

# **Advanced Engineering Environments for Small Manufacturing Enterprises: Volume II**

Steven J. Fenves

National Institute of Standards and Technology;  
Manufacturing Engineering Laboratory

Ram D. Sriram

National Institute of Standards and Technology;  
Manufacturing Engineering Laboratory

Young Choi

Chung-Ang University; Mechanical Engineering; Formerly, National Institute of Standards and Technology; Manufacturing Engineering Laboratory

Joseph P. Elm

Software Engineering Institute;  
Carnegie Mellon University

John E. Robert

Software Engineering Institute;  
Carnegie Mellon University

*May 2004*

TECHNICAL REPORT  
CMU/SEI-2004-TR-007  
ESC-TR-2004-007  
Published in collaboration with  
The National Institute of  
Standards and Technology  
NISTIR 7090





**CarnegieMellon**  
**Software Engineering Institute**

---

Pittsburgh, PA 15213-3890

# **Advanced Engineering Environments for Small Manufacturing Enterprises: Volume II**

CMU/SEI-2004-TR-007  
ESC-TR-2004-007

Published in collaboration with  
The National Institute of  
Standards and Technology  
NISTIR 7090

Steven J. Fenves

National Institute of Standards and Technology;  
Manufacturing Engineering Laboratory

Ram D. Sriram

National Institute of Standards and Technology;  
Manufacturing Engineering Laboratory

Young Choi

Chung-Ang University; Mechanical Engineering; Formerly, National  
Institute of Standards and Technology; Manufacturing Engineering  
Laboratory

Joseph P. Elm

Software Engineering Institute; Carnegie Mellon University

John E. Robert

Software Engineering Institute; Carnegie Mellon University

*May 2004*

**Technology Insertion, Demonstration, and Evaluation  
(TIDE) Program**

Unlimited distribution subject to the copyright.

This work is sponsored by the U.S. Department of Defense, and was performed jointly by Carnegie Mellon University (Carnegie Mellon) through its Software Engineering Institute and the National Institute of Standards and Technology. The Software Engineering Institute is a federally funded research and development center sponsored by the U.S. Department of Defense.

Copyright 2004 by Carnegie Mellon University.

## NO WARRANTY

THIS CARNEGIE MELLON UNIVERSITY AND SOFTWARE ENGINEERING INSTITUTE MATERIAL IS FURNISHED ON AN "AS-IS" BASIS. CARNEGIE MELLON UNIVERSITY MAKES NO WARRANTIES OF ANY KIND, EITHER EXPRESSED OR IMPLIED, AS TO ANY MATTER INCLUDING, BUT NOT LIMITED TO, WARRANTY OF FITNESS FOR PURPOSE OR MERCHANTABILITY, EXCLUSIVITY, OR RESULTS OBTAINED FROM USE OF THE MATERIAL. CARNEGIE MELLON UNIVERSITY DOES NOT MAKE ANY WARRANTY OF ANY KIND WITH RESPECT TO FREEDOM FROM PATENT, TRADEMARK, OR COPYRIGHT INFRINGEMENT.

Use of any trademarks in this report is not intended in any way to infringe on the rights of the trademark holder.

Internal use. Permission to reproduce this document and to prepare derivative works from this document for internal use is granted, provided the copyright and "No Warranty" statements are included with all reproductions and derivative works.

External use. Requests for permission to reproduce this document or prepare derivative works of this document for external and commercial use should be addressed to the SEI Licensing Agent.

This work was created in the performance of Federal Government Contract Number F19628-00-C-0003 with Carnegie Mellon University for the operation of the Software Engineering Institute, a federally funded research and development center. The Government of the United States has a royalty-free government-purpose license to use, duplicate, or disclose the work, in whole or in part and in any manner, and to have or permit others to do so, for government purposes pursuant to the copyright license under the clause at 252.227-7013.

### DISCLAIMER

The report identifies candidate commercial off-the-shelf (COTS) products for the software components relevant to SMEs. The list of candidate products presented is by no means exhaustive; in the rapidly moving CAD/CAE/CAM software product market, only a few representative products could be identified. COTS components other than those mentioned here are available. The components listed herein are intended only as a sample of available technology as of the date of this report. Inclusion in this report is not an endorsement of these components by the National Institute of Standards and Technology (NIST), the Software Engineering Institute (SEI), or the authors of this paper.

NIST disclaimer: No approval or endorsement of any commercial product by the National Institute of Standards and Technology or by Carnegie Mellon University is intended or implied. Certain commercial equipment, instruments, or materials are identified in this report in order to facilitate better understanding. Such identification does not imply recommendations or endorsement by the National Institute of Standards and Technology or by Carnegie Mellon University, nor does it imply the materials or equipment identified are necessarily the best available for the purpose. Note that most products mentioned in this report are either trademarked or registered. The URLs mentioned in the report are current as of the time of publication of this report.

For information about purchasing paper copies of SEI reports, please visit the publications portion of our Web site (<http://www.sei.cmu.edu/publications/pubweb.html>).

---

# Table of Contents

<b>Acknowledgements .....</b>	<b>v</b>
<b>Executive Summary .....</b>	<b>vii</b>
<b>Abstract.....</b>	<b>ix</b>
<b>1 Introduction.....</b>	<b>1</b>
1.1 Context of Report.....	1
1.2 Purpose .....	1
<b>2 Self-Assessment of AEE Requirements .....</b>	<b>3</b>
2.1 Self-Assessment Tool for Engineering Environments .....	3
2.1.1 Introduction .....	3
2.1.2 Function of the SAT-EE .....	6
2.1.3 Use of the SAT-EE.....	7
2.1.4 Interpretation of Results.....	8
2.2 Self-Assessment Tool for Engineering Tool Capabilities.....	8
2.2.1 Introduction .....	8
2.2.2 Function of the SAT-ETC.....	10
2.2.3 Use of the SAT-ETC .....	11
2.2.4 Interpretation of Results.....	12
<b>3 Migration.....</b>	<b>13</b>
3.1 From Scratch to CAD for Drafting.....	14
3.2 From CAD for Drafting to CAD and External Analyses .....	17
3.3 From CAD and External Analyses to a Basic AEE .....	19
3.4 From Basic AEE to Intermediate AEE.....	21
3.5 Beyond an Intermediate AEE.....	22
3.6 Additional Migration Considerations .....	23
3.6.1 Downstream Data Integration .....	23
3.6.2 PDM Adoption.....	25
3.7 Migration Summary.....	26

<b>4</b>	<b>AEE Component Selection .....</b>	<b>27</b>
4.1	Selection Criteria .....	28
4.1.1	Technical Criteria.....	28
4.1.2	Service Criteria .....	31
4.2	Selection Resources .....	33
4.2.1	Web-Based Information Resources.....	33
4.2.2	Magazines and Journals.....	33
4.2.3	Trade Shows.....	34
4.2.4	Consulting Services .....	34
4.3	Tool Selection Summary.....	35
<b>5</b>	<b>AEE Technology Adoption.....</b>	<b>37</b>
5.1	The Adoption Challenge .....	37
5.2	The Technology Adoption Process .....	39
5.2.1	Understand Existing Company Environment.....	42
5.2.2	Establish Technology Adoption Project Goals and Metrics .....	43
5.2.3	Evaluate Technology Options.....	44
5.2.4	Obtain Technology.....	45
5.2.5	Implement and Adopt Technology .....	46
5.2.6	Analyze and Deliver Adoption Results.....	46
<b>6</b>	<b>Conclusion .....</b>	<b>47</b>
	<b>Acronyms .....</b>	<b>51</b>
	<b>References/Bibliography.....</b>	<b>53</b>

---

# List of Figures

Figure 1: Excerpt from the SAT-EE.....	5
Figure 2: Excerpt from SAT-ETC .....	10
Figure 3: AEE Migration.....	13
Figure 4: The Impact of Technology Adoption .....	38
Figure 5: Shewart Cycle .....	40
Figure 6: Technology Adoption Process .....	41





---

# Acknowledgements

The authors wish to thank United States Congressman Mike Doyle (D-14-PA), who was instrumental in establishing the TIDE program, and John Foreman of the Software Engineering Institute for their support and assistance in this research.



---

# Executive Summary

This is the second volume of a two-volume report. The first volume defined the concepts of advanced engineering environments (AEEs), the benefits they could provide to small manufacturing enterprises (SMEs), technical considerations in their adoption by SMEs, and typical commercial-off-the-shelf (COTS) elements comprising AEEs [Fenves 03].

To assist the SME in adopting AEEs, two self-assessment tools are provided in this volume. Additionally, this volume provides guidance on migration paths to higher AEE capabilities, AEE component selection, and technology adoption strategies.

The first tool, the Self-Assessment Tool for Engineering Environments (SAT-EE) assists an SME in assessing the adequacy of their current computing support environment in handling technical tasks (i.e., Computer-Aided Design [CAD] / Computer-Aided Engineering [CAE] / Computer Aided Manufacturing [CAM]). This information can then be used to support decision making with respect to expanding or upgrading the environment along the migration paths presented in this report.

The second tool is the Self-Assessment Tool for Engineering Tool Capabilities (SAT-ETC). Through this tool, the SME can collect the needs and desires of the company, and map them to the capabilities of specific classes of CAD and CAE tools, showing the utility of these tools to the SME's needs.

Many SMEs evolve or migrate from lower AEE levels to higher ones. As new tools and capabilities are introduced into a company's support environment on an incremental and opportunistic basis, the SME must recognize that shifts in operational modes and philosophies will be needed to gain the full benefit of the AEE.

In choosing a tool to be added to the SME's engineering environment, the SME must consider both current and expected future needs, taking into account potential changes in business and software. The SME must consider more than just the functional capabilities of the tool, addressing issues including

- interoperability in support the organization's overall product development process;
- usability by its potential users; and

- expandability, in terms of tool features that may be subsequently added, and customization that users may apply.

Selection, procurement, and installation of a new technology will not produce the desired benefits unless the SME's staff adopts the technology and integrates it into the SME's operation. Only when the staff is aware of the technology, has access to it, is trained to use it, gets support for using it, and actually uses it, will the benefits accrue to the SME.

A six-step technology adoption process based upon the Shewart Cycle, an early model developed for process improvement, is presented [Shewart 39]. The process has been used successfully to introduce advanced technologies into SMEs and consists of the following steps:

1. Understand existing company environment;
2. Establish technology adoption project goals & metrics;
3. Evaluate technology options;
4. Obtain technology;
5. Implement and adopt technology; and
6. Analyze and deliver adoption results.

---

# Abstract

To assist the Small Manufacturing Enterprise (SME) in adopting Advanced Engineering Environments (AEEs), this report provides two self-assessment tools. The Self-Assessment Tool for Engineering Environments (SAT-EE) assists an SME in assessing the adequacy of the current computing support environment in handling technical tasks. The Self-Assessment Tool for Engineering Tool Capabilities (SAT-ETC) enables the SME to collect data on the needs of the company, and maps it to specific classes of AEE tools. An SME may migrate to higher AEE levels through an orderly sequence of steps. Migration success is enhanced by careful attention to AEE component selection and by application of a defined technology adoption process.



---

# 1 Introduction

## 1.1 Context of Report

This report is the second in a series of two addressing Advanced Engineering Environments (AEEs) and their application to Small Manufacturing Enterprises (SMEs).

## 1.2 Purpose

The purpose of this two-volume report is to build awareness of the AEE concept, and assist SMEs in evaluating the desirability and feasibility of incorporating an AEE into their business operations.

Volume I of this report presented the following [Fenves 03]:

- candidate architectures for AEEs and comments on their applicability to SMEs;
- the benefits that may accrue to an SME from the adoption of an AEE in terms of internal and external effects;
- technical considerations that enter in the decision to adopt or upgrade an AEE;
- issues that an SME must consider when incorporating an AEE into its operation; and
- the general characteristics and capabilities of architectural elements or components for AEEs targeted upon geometry-centric design efforts.

The purpose of Volume II is

- to assist the SME in assessing its current status and future needs with respect to AEEs;
- to outline a series of migration steps whereby an SME may incrementally augment and expand its software environment supporting the organization's design activities;
- to define a method for selecting and adopting the Commercial Off-the-Shelf (COTS) tools that comprise an AEE; and
- to define a process to aid the SME in adopting a new technology.





---

## 2 Self-Assessment of AEE Requirements

This section presents two tools that may be used by an SME to assess its current status and future needs with respect to AEEs and their component COTS elements:

1. Self-Assessment Tool for Engineering Environments (SAT-EE)—this tool assists an SME in evaluating the adequacy of computing support for its current design operations; and
2. Self-Assessment Tool for Engineering Tool Capabilities (SAT-ETC)—this tool assists an SME in understanding the value of various classes of engineering tools to its current and future design operations.

The function, use, and results of each of these tools are discussed in this chapter.

### 2.1 Self-Assessment Tool for Engineering Environments

#### 2.1.1 Introduction

As discussed in Volume I, Chapter 2 of this report series an AEE may be categorized at one of three levels [Fenves 03]:

1. Basic AEE;
2. Intermediate AEE; and
3. Comprehensive AEE.

This section provides a tool whereby an SME can assess the adequacy of its computing support environment in handling its technical tasks (i.e., Computer-Aided Design [CAD] / Computer-Aided Engineering [CAE] / Computer-Aided Manufacturing [CAM]). The SME can then make decisions with respect to expanding or upgrading the environment along the migration paths presented in Chapter 3.

The initial concept for this section was a form of a predictive or normative tool that could make deductions of the form “If your company designs/produces X, then it should be running engineering support environment Y.” On reflection, it became clear that dozens of aspects of the company’s business would have to be considered to define “X” with sufficient precision and detail to be able to determine the various aspects of “Y.” (These aspects are discussed in Volume I with some specificity.) Furthermore, limited trials showed that even the nature of

the aspects to consider is not clear. For example, one would expect that the nature of the product being manufactured may have some bearing on the outcome, but how would one characterize the differences in the required computational support between, say, a foundry, a welding shop, and a metal stamping plant? It was finally concluded that we don't have the knowledge and range of expertise to produce a credible predictive tool.

Attention thus turned to a less ambitious, but more achievable descriptive tool that could be used to provide a rapid, albeit very coarse, assessment of the company's current practices with respect to the environment supporting design and engineering, and of the adequacy of the currently available engineering environment. The remainder of this section deals with the resulting self-assessment tool.

See the Software Engineering Institute (SEI) Web site  
( <http://www.sei.cmu.edu/tide/publications/SAT-EE.XLS> ) for an interactive version of this tool. An excerpt from the tool is seen in Figure 1.

© 2003 by Carnegie Mellon University			
SELF-ASSESSMENT TOOL FOR ENGINEERING ENVIRONMENTS (SAT-EE) v0.6			
			RESULTS
COMPOSITE SCORE		2.0	
APPROXIMATE LEVEL OF ENVIRONMENT IMPROVEMENT OPPORTUNITIES		intermediate level none identified	
Category	Units	Response	Score
<b>CAD</b>			2.2
<b>CAD tool type</b>			5.0
Do you use a CAD tool?	y/n	y	
Desktop CAD	y/n	y	
Light-duty CAD	y/n	y	
Heavy-duty CAD	y/n	y	
<b>CAD add-ons</b>			1.0
Purchased or rented symbol and/or detail libraries	y/n	n	
Purchased or rented discipline-specific add-ons	y/n	n	
Internally developed libraries and/or add-ons	y/n	y	
<b>CAD usage</b>			3.6
% of designers that have CAD seats	%	80	
% of design information received from suppliers as CAD files	%	20	
% of design information sent to customers as CAD files	%	30	
% of design information sent to manufacturing as CAD files	%	10	
% of design information stored as CAD files reused on new projects	%	30	
<b>CAE</b>			1.7
<b>CAE tool type</b>			2.5
Do you use a CAE tool? (as opposed to spreadsheets, standalone programs, analysis consultants, etc.)	y/n	y	
Light-duty CAE	y/n	y	
Heavy-duty CAE	y/n	y	
Does the CAE tool include special features for particular kinds of applications (e. g., sheet metal forming, non-linear analysis, etc.)?	y/n	y	
Does the CAE tool support multiple analysis disciplines (e.g. stress, thermal, electromagnetic, etc.)?	y/n	n	
<b>CAE usage</b>			3.3
% of engineers that have CAE seats	%	20	
% of designers that have training in and use CAE	%	0	
% of analyses performed by outside consultants	%	20	
% of design information shared with suppliers and customers in the form of CAE models and results ( as opposed to information shared in the form of CAD models, drawings, etc.)	%	30	
Is CAE used in proposals and/or preliminary design?	y/n	y	
Is CAE used in detailed design?	y/n	y	
What is the average number of design iterations based on feedback from CAE analyses?	number	3	

Figure 1: Excerpt from the SAT-EE

## 2.1.2 Function of the SAT-EE

The SAT-EE collects information about the engineering environment at the SME in nine categories:

1. CAD (Computer-Aided Design)
2. CAE (Computer-Aided Engineering)
3. CAM (Computer-Aided Manufacturing)
4. CAD/CAE integration<sup>1</sup>
5. CAD/CAM integration
6. PDM (Product Data Management)
7. CAD/PDM integration
8. Catalog access
9. Database support

In each category, information is collected within two sub-categories:

- a. the type of tool used in that category; and
- b. some characteristic statistics about the extent of the tool's usage. In the case of CAD, there is a third sub-category of information collected about the add-ons to the COTS CAD systems.

Based on the information entered, the SAT-EE assigns the following:

- a composite numerical score, in the range of 0 to 5, for each of the nine categories;
- a weighted aggregate score, again in the range of 0 to 5, for the environment as a whole;
- an approximate determination of the level of the environment (below minimum, minimum, intermediate, above intermediate); and
- some recommended changes in the environment.

Keep in mind that the SAT-EE is very empirical and approximate in nature, since the information collected is by no means exhaustive. Furthermore, the weights, weighting functions, and composite aggregation functions were determined based upon the experience of the authors with a limited number of SMEs. While the authors believe that this tool is applicable to a wide range of SMEs, users of the tool are cautioned to carefully consider the applicability of the tool to their organization, and exercise good judgment in interpreting the results. Nevertheless, the tool is presented as a first attempt towards solving the problem of environment assessment. A future usability study may be used to evaluate its effectiveness and refine its categories, questions within the categories, weights, and weighing functions.

---

<sup>1</sup> Readers of Volume I in this series will recognize that the tool is geared towards the Basic AEE summarized in Section 2.1.1 of that volume: it is assumed that the CAD system, rather than the database system, acts as the central repository of product information [Fenves 03].

### 2.1.3 Use of the SAT-EE

Steps for using the SAT-EE are described below.

1. Activate the SAT-EE as an Excel spreadsheet. The tool is compatible with Microsoft® Excel 2002. Select the “Assessment Tool” worksheet of the tool.
2. All areas requiring user input are color-coded in bright yellow. Initially, all the responses (column F) are blank and all sub-category and category scores display the “error” message.
3. Enter a response to every question within reason. (If you answered “no” to the question “Do you use a CAE tool?” you need not answer the remaining questions in the sub-category pertaining to the CAE tool. However, in other categories there may be multiple responses; a company may be using desktop, light and heavy-duty CAD systems simultaneously.)
4. Fields marked “y/n” in the “Units” column (color coded in pale yellow) respond only to a “y” or an “n”; those marked “%” respond to an integer between 0 and 100; those marked “number” respond to an integer value.
5. When responses for a category are completed, the composite scores for the category and its sub-categories are displayed. When all categories are completed, the aggregate score, the approximate level of the environment, and the recommended changes in the environment are displayed.
6. You may experiment with alternate scenarios by clearing some or all of the responses and entering new values:
  - a. To clear all responses: click on the pull-down menu of the Excel *Name Box* (located near the upper left corner of the spreadsheet on the left side of the *Formula Bar*); click on “AllResponses”; and press “Delete.”
  - b. To clear values in a particular category: click on the pull-down menu of the *Name Box*; click on the name of the appropriate response category (e.g., “PDMResponses”); and press “Delete.”

---

® Microsoft and Excel 2002 are registered trademarks of Microsoft Corp., Redmond, WA.

## 2.1.4 Interpretation of Results

The Composite Score (cell H6) is calculated as the weighted average of nine category scores, weighted is as follows:

<u>Category</u>	<u>Weight</u>
CAD	2
CAE	1
CAM	1
PDM	1
CAD/CAE Integration	1
CAD/CAM Integration	1
CAD/PDM Integration	1
Catalog Access	1
Database	1

Examination of each of these category scores will reveal areas for potential improvement that could enhance the AEE level of the organization. The user may experiment with these areas to assess the impact of proposed changes. The SME must evaluate these potential improvement areas in the context of its business strategy to achieve meaningful operational improvement.

The Composite Score (cell H6) presented by the tool is a numerical approximation of the current AEE level of the respondent. AEE levels are derived from this score as follows:

<u>Composite Score</u>	<u>AEE level</u>
less than 0.9	below Basic AEE level
0.9 to 1.7	Basic AEE level
1.8 to 3.3	Intermediate AEE level
3.4 and above	Comprehensive AEE level

## 2.2 Self-Assessment Tool for Engineering Tool Capabilities

### 2.2.1 Introduction

This section describes a tool whereby an SME can assess its needs for computational tools for technical (CAD/CAE) tasks and identify the additional needed tools according to the appropriate criteria. (These criteria will be discussed in detail in Chapter 4.)

The initial concept for this section was for a multi-level tool that would

1. Identify SME needs that could be addressed with an AEE or one of its components;

2. Identify SME problems that could be addressed with an AEE;
3. Map SME problems and needs to generic AEE functions; and
4. Map generic AEE functions to classes of tools comprising AEEs.

The first two steps turned out to produce extremely long lists of hypothetical needs and problems without much structure. As soon as some structuring was attempted, it became clear the next two steps would have to be collapsed: AEEs have very little functional redundancy, and a need can be addressed or a problem solved by only one software component of the AEE. The capabilities of the AEE component tools provide the organizing principle for the needs and problems.

Thus, the needs assessment tool became less ambitious, but more practical as a descriptive tool which could be used to provide a rapid, albeit very coarse, assessment of the company's needs—and desires for—problem-solving capabilities contained in AEE component tools. The remainder of this section deals with the resulting self-assessment tool.

See the SEI Web site ( <http://www.sei.cmu.edu/tide/publications/SAT-ETC.XLS> ) for an interactive version of this tool. An excerpt from the tool is seen in Figure 2.

SELF-ASSESSMENT TOOL FOR ENGINEERING TOOL CAPABILITIES (SAT-ETC) v1.01									
© 2003 by Carnegie Mellon University									
Category	Response							Current value	Potential value
								2.10	2.83
								Score	
	Very valuable; in routine use today	Valuable; in occasional use today	Marginally valuable; available but we have no training	Potentially very valuable; would use immediately if we had access to capability	Potentially valuable; would consider using if we had access to capability	Not valuable or unable to comment		Current value	Potential value
<b>MECHANICAL CAD</b>								2.16	3.52
<b>3D Component Design</b>								1.7	2.1
A1 Create 3D models of mechanical and structural components		y							
A2 Define and use "parametric" 3D component models constructed such that a change in a dimensional "parameter" results in a change of the design and appearance of the component (i.e. changing the dimension of a hole diameter automatically resizes the hole shown in the design)			y						
A3 Define and use constraints on 3D component models (e.g. specify that two surfaces are parallel, specify that two cylinders are concentric, etc.)				y					
A4 Compose component models using saved features, catalog entries, and other components			y						
A5 Assign/display component dimensions and tolerances		y							
A6 Assign/display component annotations such as dimensions, tolerances, explanatory notes Bill-of-materials reference numbers, etc.					y				
A7 Assign/display non-geometric attributes of components such as material properties, surface finishes, etc.						y			
<b>3D Assembly Design</b>								0.2	6.7
B1 Generate 3D sub-assemblies and assemblies by merging component models				y					
B2 Define interfaces between components parametrically. For example, two flanges may be connected by a circle of "N" bolts. The value of N defines the number and spacing of the holes in both components, as well as the number of bolts on the BOM.					y				

Figure 2: Excerpt from SAT-ETC

## 2.2.2 Function of the SAT-ETC

The SAT-ETC collects information about engineering problem-solving needs in the following categories and sub-categories:

1. Mechanical CAD
  - a. 3D Component Design
  - b. 3D Assembly Design
  - c. 3D Model Reuse
  - d. 3D Model Post-Processing – Graphical
  - e. 3D Model Post-Processing – Non-Graphical
2. CAE-Finite Element Analysis
  - a. analysis model generation and import
  - b. analysis model idealization and discretization



- c. analysis model reuse
- d. analysis options
- e. analysis purpose
- f. structural analysis options
- g. computational fluid mechanics analysis options
- h. electrostatic/electromagnetic analysis options
- i. thermal analysis options
- j. multiphysics analysis options
- k. post-processing of analysis results

### 3. CAD-CAE Integration

- a. importing from CAD to CAE
- b. idealization of CAD model into CAE model
- c. post-processing of CAE model
- d. exporting from CAE to CAD

In each sub-category, a number of problem-solving capabilities are listed and the user is asked to rate both the value and the extent of use as either

- very valuable - in routine use today;
- valuable - in occasional use today;
- marginally valuable - available but we have no training;
- potentially very valuable - would use immediately if we had access to capability;
- potentially valuable - would consider using if we had access to capability; or
- not valuable or unable to comment.

Based on the information entered, the tool assigns a Current Value and a Potential Value, on a scale of 10.0 to 0.0, to each sub-category, then to each of the three main categories, and finally to the response as a whole.

## 2.2.3 Use of the SAT-ETC

Steps for using the SAT-ETC are described below.

1. Activate the SAT-ETC as an Excel spreadsheet. The tool is compatible with Microsoft® Excel 2002. Select the “Assessment Tool” sheet of the Workbook
2. Initially, all the responses (columns C through H) are blank and all sub-category and category scores display the “error” message.

3. Enter your responses. Enter only one “y” in each row. A character other than “y” does not contribute to the score.
4. When responses for a category are completed, the composite scores for current and potential values of the category are displayed.
5. When all categories are completed, the aggregate scores are displayed.
6. You may experiment with alternate scenarios by clearing some or all of the responses and entering new responses:
  - a. To clear all responses: click on the pull-down menu next to the *Name Box* (leftmost box in bottom row of Excel banner; this normally displays the designation of the currently active cell); click on “All Responses”; and click on “Delete.”
  - b. To clear responses in a particular category: click on the pull-down menu next to the *Name Box*; click on the name of the appropriate response category (e.g., “CAD Responses”); and click on “Delete.”

## 2.2.4 Interpretation of Results

Based on the information entered, the tool assigns a Current Value and a Potential Value, on a scale of 10.0 to 0.0, to each sub-category, then to each of the three main categories, and finally to the response as a whole. Although the aggregated scores are not as meaningful as in the self-assessment tool presented in the previous section, the user is advised to scan the sub-categories for high Potential Value scores—these are the tools and tool capabilities that should influence the tool selection process described in Chapter 4 of this report.


Keep in mind that the SAT-ETC is empirical and approximate in nature, due to the fact that the information collected is by no means exhaustive, nor is the set of sub-categories for each main category. Furthermore, the set of main categories was purposely restricted to three (i.e., mechanical CAD, CAE using FEA, and the integration of the two) in order to make the needs self-assessment tool manageable in size. Finally, for simplicity, the authors have chosen to treat each sub-category independently of the others, when in reality many of the sub-categories are coupled (e.g., the Analysis Purpose and the Analysis Options sub-categories may be strongly coupled with the domain-specific sub-categories as well as the Integration sub-categories). While the authors believe that this tool is applicable to a wide range of SMEs, users of the tool are cautioned to carefully consider the applicability of the tool to their organizations, and exercise good judgment in interpreting the results. Nevertheless, the tool is presented as a first step towards an assessment solution. A future usability study may be conducted to evaluate its effectiveness and refine its categories, sub-categories, problem-solving capabilities, rating scale and rating aggregation.

---

## 3 Migration

The purpose of this chapter is to outline a series of migration steps whereby an SME can incrementally augment and expand both its software environment supporting design activities, as well as linkages between that environment and other corporate activities. The transformation of an SME's design capabilities from a manual drafting state to an AEE is segmented into five distinct steps as listed below and shown in Figure 3.

<u>FROM</u>	<u>TO</u>
1. Scratch (i.e., manual)	CAD for drafting
2. CAD for drafting	CAD and external analyses
3. CAD and external analyses	Basic AEE
4. Basic AEE	Intermediate AEE
5. Intermediate AEE	Beyond

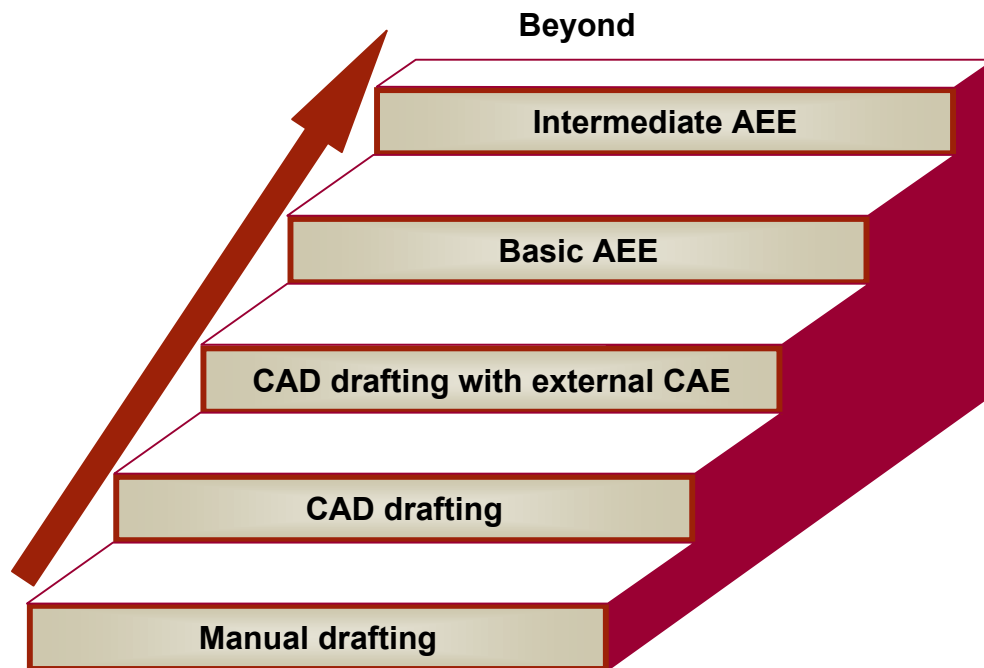

*Figure 3: AEE Migration*

Each of the steps described requires considerable learning, experience building, and confidence building on the part of all the participants before the organization is ready to take the next step. To ensure complete adoption of the current level and readiness to advance, it is recommended that the SME execute at least two full product development cycles prior to initiating efforts to migrate to the next level. Although the steps are described in this report as discrete ones, many organizations expand their computing environments incrementally, as new needs or corporate functions arise and as new capabilities offered by software vendors become technically and economically justifiable. Nevertheless, the environments defined by the steps outlined in this report represent fundamentally different modes of operation and philosophical outlooks on computer-aided product development. The environments resulting from the steps described in detail below are considered to be prototypical of the development of engineering drafting environments over the past two decades.

Each step is described by means of a standard template, consisting of the following components:

- *Synopsis of Situation*: a brief description of the characteristic features of the organization's current computing environment;
- *Symptoms*: signals, both internal and external, that indicate that the current situation is becoming difficult or uneconomical to maintain and that a transformation to a higher level is warranted;
- *Alternatives*: aspects of the transformation that must be considered, and a partial list of the alternatives available for selection in each aspect;
- *Decisions/evaluations*: the criteria to be used for each selection and the technical considerations that may enter into the ranking or selection of the alternatives;
- *Training needs and other preparations*: the technical, organizational and personnel issues to be addressed in preparation for the migration; and
- *Results to be expected*: a brief description of the changes that may realistically be expected to occur after the new environment is put in place.

### 3.1 From Scratch to CAD for Drafting

*SYNOPSIS OF SITUATION*: Manual drafting (i.e., pen, paper, and drafting boards) is rare today, but may exist in some small manufacturing enterprises. Recent surveys show that 75% of SMEs use some form of CAD in their design process [SPIRC 01]. For the remaining 25%, computers may be used in accounting, parts inventories, etc., and partial CAD modeling may be practiced for Numerically Controlled (NC) machining purposes. However, no CAD tools are used for design; all design documentation consists of paper-based drawings. Engineering design functions may use spreadsheets or some stand-alone tools as organizational or analytical aids.

*SYMPTOMS:*

- Maintenance of paper drawings is cumbersome.
- It is hard to search drawings for design reuse.
- Complete redrawing is necessary even for the most minute design modification.
- Lack of analyses necessitates repeated physical prototype construction and testing.
- Paper-based communication is inefficient, both vertically (e.g., with clients, the manufacturing division, suppliers) and horizontally among design and engineering groups.

*ALTERNATIVES:* Clearly, the prime issue to consider is the installation of a CAD system. The options to be explored are below:

- **CAD system level** – Alternatives for the level of the CAD system range over
  - Entry level, sometimes referred to as a desktop system;
  - “Light” version of one of the major CAD systems; or
  - Full strength version.
- **CAD system customization** – Alternatives for the degree of customization needed for the CAD system are as follows:
  - No customization, use the CAD system “out of the box”, adapting design methods to suit the CAD system;
  - Purchase or rent symbol and/or detail libraries from CAD vendors or third parties;
  - Purchase or rent discipline-specific add-ons (e.g., sheet metal drafting) from the same sources; or
  - Contract out for the development of custom libraries.
- **CAD/CAM integration** – Alternate degrees of integration may be pursued. Some options are as follows:
  - Install the same tool or platform for CAD and CAM, with different add-ons;
  - Plan on using different tools for CAD and CAM and interfacing (exchanging models between) them (e.g., via the Standard for the Exchange of Product Model Data [STEP]); or
  - Initially provide no interfacing.
- **Personnel allocation** - This may be an even harder choice than software/platform selection. The extreme points of alternatives are as follows:
  - No segregation of duties: all designers will operate the CAD system; or
  - Separation of functions between designers and CAD station operators.

*DECISIONS/EVALUATIONS:* The above options must be explored in terms of the considerations below:

- **Choice of CAD level** – The choice of CAD level (i.e., entry, light, or full-strength) influences both the procurement costs and the operator training requirements. Entry-level sys-

tems provide the least demanding transition from paper-based design, in both system cost and training, but their performance can easily degrade when working on larger CAD files typical of commercial products. Mid-range versions, while somewhat more demanding in training, are intended to offer a smooth transition to the next level, should that be warranted.

- **Choice of customization level** – The degree of customization chosen for a COTS CAD system also influences cost; however, it may also significantly increase the efficiency, productivity, and satisfaction of the users. Purchase, rental or acquisition as freeware of symbol and detail libraries, and generally of add-ons, provides big dividends in productivity at small incremental cost. Large amounts of customization are to be avoided. At this stage of low in-house familiarity with the tools, the organization must take care to avoid becoming overly dependent on the provider of the customized software.
- **Choice of integration strategy** – Whether the products designed by the SME are manufactured within the organization or by outside suppliers, CAD/CAM integration should be adopted from the outset. Unless there is some legacy software that warrants interfacing between CAD and CAM tools, it makes sense to adopt the same platform from the start.
- **Personnel allocation choices** – Allocation of personnel should reflect the enterprise's policies and working conditions. In an informal, task- or project-oriented design department, it makes sense to have all designers access the CAD system directly, whereas in a more hierarchically structured workplace specialized CAD station operators, who are trained to be experts in using the tools, would make more sense.

*TRAINING NEEDS AND OTHER PREPARATIONS:* The most important preparation has to do with personnel: selection of the personnel allocation method; training and/or hiring of personnel; and planning and training for the specialized functions that will arise (e.g., CAD system manager, CAD system maintainer, CAD file archivist, etc.). The introduction of a new mode of doing business warrants, even mandates, a thorough review of the organization's processes, and if necessary, a reorganization. Finally, a plan must be developed and maintained for the upgrading and expansion of the engineering environment and the orderly replacement of its components [Place 01].

*RESULTS TO BE EXPECTED:* After some initial training and a learning curve, the organization will find that it takes less time to generate even initial drawings. Search for and modification of drawings will be drastically improved. Electronic storage of drawings will prove to be convenient and will rapidly lead to increased design reuse. Generation of derived information, such as assembly drawings and BOM, will be easier and much more error-proof. Eventually, the advantages of a smooth transition to downstream processes, especially with 3D models (CAE, CAM), will become obvious. Communication with other designers, engineers, and clients by means of CAD data will be easier.<sup>2</sup>

---

<sup>2</sup> Anderson, W. *Enabling E-Commerce—Creating an Electronic Environment*. Pittsburgh, PA: Software Engineering Institute, Carnegie Mellon University. To be published.

## 3.2 From CAD for Drafting to CAD and External Analyses

*SYNOPSIS OF SITUATION:* Two-dimensional (2D) and/or three-dimensional (3D) CAD tools are used for drafting and for representation and communication of the product's geometry only. In all other respects, conventional or "traditional" engineering practice prevails, except for the substitution of CAD tools for drafting boards.

*SYMPTOMS:* Rough analyses are carried out using design manuals, tables, formulas and possibly spreadsheets and stand-alone programs. Whatever analysis model exists is manually built by the engineers, with extensive dependence on the engineers' expert knowledge. Analysis is even harder for innovative designs or new design configurations about which there is less expertise. The products tend to be over-designed due to the engineers' lack of confidence in predicting the product's performance, potentially increasing product cost. Designs are verified with costly physical prototypes. There is slow response to customers' Requests for Quotation (RFQs) that have substantial technical specifications. Design reuse is not easy due to the separate management of design and analysis data.

*ALTERNATIVES:* The prime issue here is the improvement of CAE analysis capability commensurate with the improved geometry manipulation capability afforded by a CAD system. The two major alternatives are to engage an external consultant or to jump a step in the progression discussed in this report and initiate in-house analysis competence. The remainder of the discussion addresses the first alternative; the second one will be presented in the discussion of the succeeding step. The major issues in selecting an external consultant are as follows:

1. Consultancy provider type
  - national firm;
  - local firm or branch;
  - small firm or individual; or
  - application Service Provider (ASP).
2. Timing of analyses in the design cycle
  - early, e.g., in preliminary design or even in response to a RFQ;
  - late, typically after detailed design is complete; or
  - at several stages of the design process.
3. Scope of consultant functions
  - "turnkey" operation; the consultant models, idealizes, analyzes, interprets analysis results, and recommends design changes as needed;
  - consultant is given a CAD model produced by the SME. The consultant idealizes and analyzes the model, interprets the results, and reports to the SME; or

- the SME performs modeling and idealization. The consultant performs the analysis. The SME interprets the analysis results and executes design changes as needed.
4. If multiple functional domains are involved (e.g., structural, thermal, fluid flow, etc.), does the organization engage
    - one analyst who functions in all domains; or
    - several analysts, one for each domain?
  5. Disposition of existing in-house analysis software
    - continue its use;
    - cancel further use; or
    - develop in-house software for checks on consultant's results.

*DECISIONS/EVALUATIONS:* The issues above must be explored with regard to the following factors:

- **in-house vs. external analysis** - external capability is considered to be better where the current in-house analysis activity is minimal and the size of the enterprise is not large enough to maintain analysts and analysis tools.
- **provider type** - the main considerations are ease of access (physical or virtual), consultant availability when needed, and continuity of expertise. Small consulting firms tend to have higher staff turnover than large ones, and individuals, whether “moonlighting” or not, tend to be more tied up with on-going tasks than larger consulting firms. ASPs are a new phenomenon: they are certainly good candidates for providing “raw” analysis capabilities, but their performance at other levels (e.g., idealization and interpretation) has not yet been well established.
- **timing of analysis** - While it may be highly desirable to involve consultants early in the design process, the normal response time required by the SME in these early activities, particularly in the “turnkey” mode, makes this unsuitable, if not impossible. By far the most typical use of analyses performed by consultants is for design verification after the detailed design is (essentially) complete. With proper planning and coordination the consultant may be brought in early and given time to develop a model “template”; then the template may be used repeatedly as the design process unfolds.
- **consulting scope** - The alternative scopes range from essentially full involvement by the consultant to essentially full in-house involvement, “farming out” only the resource-consuming “number crunching” part of the analysis. The choice will be governed by the extent of internal experience and expertise; typically, as this expertise develops, the dependence on outside consultants will decrease.
- **consulting breadth** - If multiple domains are involved, it is probably easier to manage interactions with one consultant than with several ones; however, there may be cases where the specialized expertise needed in some of the domains may only be available from firms specializing in that domain only.
- **disposition of legacy tools** - Sometimes, SMEs may have legacy software tools that are in use for in-house analysis. These “home grown” tools reflect the SME's prior product development experience, and are often in the form of user-developed software (e.g., do-



main-specific code, custom spreadsheets). It certainly does not make sense to perform in-house analyses on tasks for which a consultant has been engaged. (More appropriately, it does not make sense to engage an external consultant for tasks for which there is available in-house expertise supported by suitable tools.) However, use of in-house tools may continue in the early design stages when there is not yet a sufficiently detailed model to turn over to the consultant. Furthermore, these tools may also be useful for performing coarse or approximate checks on the consultant's detailed results; this effort is imperative for the SME to ensure adequacy of the consultant's analysis.

*TRAINING NEEDS AND OTHER PREPARATIONS:* In terms of personnel needs, even for the turnkey mode, a few engineers knowledgeable about the analysis task will be needed; introductory seminars or short courses are advisable for all engineering personnel. Training must be provided to engineers so that they can evaluate analysis models, interpret analysis results, and accept analysis feedback to modify designs (if production time permits). Training also must be provided for CAD modelers so that they produce "good" geometric models conforming to CAE tool needs. The engineering process must be reviewed, and if necessary adjusted, to accommodate the consultant's turnaround time; in the "turnkey" mode this may be in the order of weeks. In addition to process changes, management will have to address issues of professional responsibility and establish a responsibility chain for the technical performance of the products. Plans for future migration to internal analyses should be in place early in the transition.

*RESULTS TO BE EXPECTED:* More detailed and thorough analyses with up-to-date analysis tools will provide increased confidence in the performance of the company's products. Design verification will be less costly and time-consuming with the possible elimination of some physical prototypes. Templates of prototypical products will provide faster turnaround on repetitive product types. On the other hand, analyses for innovative designs or new product configurations will be much easier with proper analysis tools. Design reuse will be easier with design and analysis data managed more closely. The organization will find that it can automate substantial portions of the analysis process, becoming less dependent on the engineering experts' knowledge.

### **3.3 From CAD and External Analyses to a Basic AEE**

*SYNOPSIS OF SITUATION:* Engineering analysis is dependent on external contractors, even though in-house engineers have gained increased knowledge of CAE processes, particularly of how to interpret analysis results and feed them back for design enhancement. The organization recognizes the importance of engineering analyses throughout the design process and is ready to invest in CAE tools and personnel.

*SYMPTOMS:* The number of design/analysis iterations is limited due to the long turnaround cycles. Design optimization, whether for performance or cost, is difficult to achieve due to inefficient communication between designers and external analysts. Engineering knowledge

is not accumulated systematically for future reuse. There are concerns about the security of proprietary intellectual property communicated to the external consultants.

#### *ALTERNATIVES:*

- The primary issue is the “internalization” of the analysis capability through the installation of a CAE system. The options to be explored are discussed extensively in Volume I, Chapter 4 of this report in terms of the following aspects:
  - choice of depth in terms of levels of the design process (e.g., conceptual, preliminary, detailed) to be supported;
  - choice of breadth in terms of the number and kinds of design sub-disciplines to be supported;
  - choice of CAE components of the environment;
  - choice of component specialization (sheet metal, injection molding, etc.);
  - choice of COTS products; and
  - the degree of customization that will be required.
- Another issue involves personnel allocation. As in the case of the CAD system selection, this may be an even harder choice than the CAE component and COTS product selection. Again, the extreme points of alternatives are as follows:
  - No segregation of duties: all engineers use the CAE system(s) on their own; or
  - Separation of functions between engineers and CAE analysts.

#### *DECISIONS/EVALUATIONS:*

- **CAE options** - See Volume I, Chapter 4 of this report for a discussion of criteria and options on CAE tool selection.
- **Personnel allocation** - Choices regarding personnel allocation should reflect the enterprise’s policies and working conditions. In an informal, task- or project-oriented engineering department, it makes sense to have all engineers use the CAE tools directly, with only a very few full-time analysts; in a more hierarchically structured or compartmentalized workplace, dependence on a dedicated analyst group would make more sense. In either organizational mode, interaction between engineers and analysts can be enhanced by providing “light” versions of the CAE tool to the first group and “full-strength” versions of the same tool to the second group.

*TRAINING NEEDS AND OTHER PREPARATIONS:* Personnel decisions will include the following: selection of allocation method: training and/or hiring of personnel; decisions on specialization of functions between analysts and designers. Engineers must be trained to build and use coarse-grained analysis models suitable for proposals and conceptual designs. Engineers must also be trained to use feedback from analysis results to modify designs iteratively and to do sensitivity analyses. The design process will have to be reviewed and/or reorganized to move analysis upstream into the early design stages and to organize the design process for design iterations. The organization must develop policies for determining when a design is considered “good enough” without further iterations. As always, the firm has to plan for replacement, upgrades, and expansion of the environment.

*RESULTS TO BE EXPECTED:* The organization will find that it can set up efficient engineering processes with tools suited for its specific need. It will be able to provide faster responses to customers' RFQs with demanding technical specifications, thus gaining a competitive edge in the marketplace. Design and analysis processes will be coupled, providing for easier preparation of analyses and rapid turnaround. It will become easier to optimize designs for performance and cost, and to reuse engineering knowledge [Elm 03].

### 3.4 From Basic AEE to Intermediate AEE

*SYNOPSIS OF SITUATION:* Design is driven primarily by geometry: CAD models and drawings are at the center of the product data representation, with analysis processes weakly linked to the spatial design. Design rationale is not captured in the product data representation. There is no systematic creation and management of a complete and persistent representation of the evolving product model from the earliest conceptual design steps to the completion of the detailed design and beyond to manufacturing.

*SYMPTOMS:* Design intent and knowledge applied are not captured in the product representation. Design reuse is difficult without access to the design intent embedded in the product data. Lack of a central product data model, encompassing both geometry and engineering function/behavior information, makes sharing information between different disciplines inefficient and collaboration hard to achieve. With the predominance of geometry, most engineering analysis activities can start only after the CAD model is fairly well developed; engineering activities are not easily accommodated during the early stages of the design evolution process.

*ALTERNATIVES:* The prime issue is the achievement of seamless two-way interoperation among all tools, the CAD tool included. This can be achieved in three ways: direct tool interfacing, interfacing through translators, or interfacing via a database. The alternatives to explore are:

- direct tool interfacing through a common “native” language;
- interfacing through translators and/or neutral files e.g., STEP, IGES (Initial Graphics Exchange Specification); or
- interfacing via a database system; in this case, further decisions must be made on the scope, location, and nature of the database (it is highly unlikely that the development of such a database system will be a viable choice for an SME).

*DECISIONS/EVALUATIONS:*

- **Direct interfacing** - At today's state of technology, direct interfacing through a common “native” language is possible only if all tools are provided by the same vendor or consortium of vendors, which is rarely the case for a realistic array of CAD/CAE/CAM tools.

- **Interface via translation** - The translation-based interfacing options fall into two classes: tool-to-tool two-way direct translators, and translators to and from a central representation, often called “neutral files.” A true “neutral file” capable of interfacing with all tools used in a firm would, in many respects, be functionally equivalent to the shared database of the next alternative.
- **Interface via database** - In the database option, a host of issues must be addressed. Today, only large corporations can dedicate the resources needed for building custom databases, and even they have largely switched to buying COTS systems that are “tailored” by the vendor, or a third party, for them. An SME would typically be buying one such system.

*TRAINING NEEDS AND OTHER PREPARATIONS:* Personnel decisions will include training/hiring for specialization of functions (e.g., analysts in each domain); generalized functions (e.g., designers knowledgeable in several analysis domains); new specializations (e.g., design librarian). Engineers must be trained to build and reuse analysis models for proposals and conceptual designs. They will also require training to merge analysis feedback from several domains to iteratively modify designs and to perform sensitivity analyses. Process review/ reorganization decisions will include the following: moving analyses further upstream; organizing for design reuse; establishing timing and priorities among different domain analyses; establishing archiving and feedback recording policies. Plans must be put in place for replacement, upgrade, and environment expansion.

*RESULTS TO BE EXPECTED:* The organization will be able to create and manage persistent representations of the evolving product model from start to finish. There will be efficient support of all engineering analysis activities during the entire design phase. Design reuse will be dramatically improved by the shared storage of geometry and engineering design data. The link between design and analysis processes will be tightened to the point that integrated design analysis, function-driven design and multifunctional design analysis can be routinely performed.

### 3.5 Beyond an Intermediate AEE

*SYNOPSIS OF SITUATION:* This is largely uncharted territory, because only a few of the largest manufacturing enterprises (e.g., in the automobile, aerospace, and defense industries) have reached a level beyond intermediate, and extrapolation to SMEs is difficult. Organizations at this level typically maintain a representation of the product model that is independent of the CAD system used in its creation. This product model contains the basic CAD model, as well as additional data capturing the design rationale. Application-specific data may also be maintained in parallel for tighter integration, mainly for analysis applications. Extensions such as PDM and catalog facilities are also generally used.

*SYMPTOMS:* Product data are effectively utilized only inside the design and analysis departments. The environment does not support a global engineering architecture. There is a rou-

tine need for integrating internal and external (contracted out) designs and for configuration management of a complex product or product suite over many engineering units, both internal and external. There are serious problems in communication between the core activities integrated into the environment and various vertical and horizontal applications external to the environment.

*ALTERNATIVES:* The alternatives involve incorporating new tools and/or new applications into the current environment, thereby expanding the environment through new components. Function-driven design tools, knowledge-based CAD systems, and multidisciplinary simulation and synthesis systems are potential examples in the first category. Immersive CAD technology, virtual manufacturing, and collaboration support technologies are examples of AEE components that may be added.

*DECISIONS/EVALUATIONS:* There is no established precedent for selecting among the alternative expansions or their constituents.

*TRAINING NEEDS AND OTHER PREPARATIONS:* Again, there is no established precedent. There are training needs for the new skills introduced by the new components, and training needs for existing personnel to integrate the new tools in their tasks.

*RESULTS TO BE EXPECTED:* Improved management of product development processes, including the creation, monitoring, and modification of design documents and databases, may be expected. Evaluation of the operability, manufacturability, and maintainability of the proposed designs may be performed as part of the design process, enabling designers to predict and address issues before they arise. Seamless sharing of product data in a distributed and heterogeneous engineering environment and effective collaboration through various communication channels between agents and repositories will become the mode of operation.

## **3.6 Additional Migration Considerations**

Two additional migration considerations, namely, downstream data integration and PDM adoption, are presented separately because they are essentially independent of the level of the engineering environment. The two issues may be addressed at any of the levels discussed, either in conjunction with one of the transformations discussed above, or separately.

### **3.6.1 Downstream Data Integration**

*SYNOPSIS OF SITUATION:* The organization does not use any CAM tools, or separate CAD and CAM tools are used without careful consideration of their integration or interoperability.

*SYMPTOMS:* There is extensive rework in the CAD system or manual entry to the CAM system because of the presence of incompatible geometric models, typically encountered late in the product delivery process when generation of numerical control code for machine tools is first attempted. Due to the lack of linkage to the CAD system, machining operations that are suboptimal in quality, time and/or cost may result.

*ALTERNATIVES:* The issue is a simple one: establish CAD/CAM integration/interoperation. The alternative approaches are the following:

- shared platform for both CAD and CAM;
- interfaced platforms with vendor-supplied built-in interfaces;
- shared files (e.g., STEP); or
- integration via PDM (see below).

*DECISIONS/EVALUATIONS:* The choice among the alternatives listed will largely depend on external, non-technical, considerations such as the following:

- the nature of engineering/manufacturing interaction. If design and manufacturing are tightly integrated (in the extreme, no internal designs are manufactured outside, no external designs are manufactured inside), a shared platform supplied and maintained by a single vendor makes more sense. At the other extreme, if most of the designs are “farmed out” for outside manufacturing and/or manufacturing produces mostly designs of outside organizations, shared files in standard formats such as STEP may be the most practical.
- familiarity with tools at both sites. If either engineering or manufacturing has long been using one tool, it makes sense to install a shared or interfaced tool for both sites.
- the position in the supply chain. Sometimes the choice is made for the SME by a larger client dictating the CAD or CAM tool to its suppliers, or a large supplier making it advantageous to the client to have compatible tools. This factor may be less important in the future as Web viewing tools will increasingly provide translations as well.

*TRAINING NEEDS AND OTHER PREPARATIONS:* For engineering, the primary personnel training/hiring issue is that of training CAD modelers to produce “good” design models conforming to CAM tool and production needs. Quality control and change control policies and their implementations must be developed jointly between engineering and manufacturing.

*RESULTS TO BE EXPECTED:* The standard CAD modeling practice previously used for design only will now also result in near-flawless NC code generation. Where CAM modeling detects that the CAD models are incomplete, CAD data-healing technologies (i.e., COTS products that identify and correct common CAD errors that produce erroneous CAM files) can be utilized.

### 3.6.2 PDM Adoption

*SYNOPSIS OF SITUATION:* The organization uses CAD (and possibly CAM) tools, but product data, documents, and drawings are dispersed over several systems and inefficiently managed. Design process management is treated entirely separately from the management of the data generated and used in that same process.

*SYMPTOMS:* It is difficult to share design documents and product data among engineers working on different stages or disciplines in the design process. There may be duplicate data inputs and/or inconsistencies among different versions of the emerging product's design. Separate design process management and product data management either produce conflicts and contradictions, or are de-emphasized so as not to produce conflicts. Design reuse is hampered by the separation of process and product data.

*ALTERNATIVES:* The issue again is a simple one: introduce a PDM system that integrates design process management and product data management. The alternatives to consider are as follows:

- scope of PDM system
  - engineering only;
  - enterprise-wide; or
  - integrated with clients and/or suppliers.
- integration into environment
  - stand-alone application (i.e., PDM data are entered and used separate from engineering and manufacturing applications); or
  - integrated with CAD/CAE/CAM tools.

*DECISIONS/EVALUATIONS:* As with the CAD/CAM integration discussed above, both the choices of scope and the manner of integration with the design environment will largely depend on external factors, primarily on the nature of integration between engineering and management and on the organization's position in the supply chain (see discussion above). A separate PDM system makes little sense today when so many integrated systems are available. Access, via the Web, to the client's or supplier's PDM system makes sense. However, external access to the SME's engineering information must be evaluated and then very carefully controlled when such interfaces are provided; PDM systems provide direct access and usually only monitor transactions by after-the-fact logging.

*TRAINING NEEDS AND OTHER PREPARATIONS:* Personnel hiring/training decisions involve the personnel who will be hired to run the PDM system or who will be retrained for PDM from the organization's current process management functions. The process control policies and their implementation must be thoroughly planned to obtain the maximum value from the PDM integration.

*RESULTS TO BE EXPECTED:* The organization can expect the following: increased productivity; improved product quality from fewer errors in product data and the potential of detecting downstream quality problems early in the design process; increased data security: rapid availability of information irrespective of product development stage or user location; and ease of search for parts and documents. These benefits will accrue from better version control and document tracking provided by PDM systems as well as better engineering process and change management introduced by the organization as part of the implementation of PDM.

## **3.7 Migration Summary**

The evolution of an organization's computing support environment has been presented as a series of transformations between levels. Even if new tools are introduced into a company's support environment on an incremental and opportunistic basis, the levels referred to throughout this report represent fundamentally different modes of operation and philosophical outlooks on computer-aided product development. The question of what level of the computing environment deserves to be called an advanced engineering environment is moot. A company that progresses two levels in the hierarchy presented here will view its environment as advanced in a few years.



---

## 4 AEE Component Selection

As discussed in Chapter 3, the largest step in migrating from one level of AEE to the next is the acquisition of a new tool and the insertion of that tool into the SME's enterprise and design process. The purpose of this chapter is to outline a series of considerations that enter into the selection and acquisition of a tool to be added to an SME's engineering environment. The chapter presents only generic considerations that hold for all the tools discussed in this report, and does not deal with considerations of the specific selection criteria of classes of tools (e.g., criteria on the types of nonlinear analysis for selecting a CAE tool).

It is assumed that an evaluation of the SME's needs has confirmed the technical basis for acquiring a tool within a particular class, and that at least a preliminary analysis has confirmed the economic viability of that acquisition.

AEE component selection is a multi-criteria decision-making problem, and almost every decision maker can use some assistance in the process. Therefore, the chapter contains a brief discussion of some of the resources on which an SME can draw. Due to the both the importance and the complexity of the tool selection activity, it is important for SMEs to do the following<sup>3</sup>:

- understand their businesses and how the proposed software will support their firms' growth strategy
- develop or use processes to assign tasks and involve stakeholders
- if necessary, involve specialists in decision support and technology adoption to help clarify issues and identify potential pitfalls
- investigate vendors and their software offerings from a variety of perspectives

Finally, there is the issue of tool granularity. The selection criteria presented here tend to assume a coarse-grained selection and acquisition process, e.g., selecting a CAD tool or a PDM tool, in a process similar to selecting a drafting table or a file cabinet. Today's AEE component tools are closely interfaced and bundled, and the choices to be made tend to be more fine-grained. The technical capability that one wishes to acquire may be available as an upgrade of or an add-on to one of the tools in the SME's current "toolbox." This fact may result

---

<sup>3</sup> Anderson, W. *Enabling E-Commerce—Creating an Electronic Environment*. Pittsburgh, PA: Software Engineering Institute, Carnegie Mellon University. To be published.

in having to make much more heterogeneous choices, comparing add-ons for existing tools to brand new tools.

## **4.1 Selection Criteria**

### **4.1.1 Technical Criteria**

Key technical criteria for the selection of an AEE component include functionality, interoperability, usability, and expandability.

#### **4.1.1.1 Functionality**

Clearly, the first criterion for selecting an AEE component, or evaluating a potential component, is that it provides the functionality that is needed by the organization. The SAT-ETC discussed in Chapter 2 is designed specifically to elicit some of the potential needs of an SME, and should be consulted first. However, the SAT-ETC can obviously never be complete, and the SME will generally identify additional functionalities needed beyond those addressed by the SAT-ETC. Reviews of past designs and of their documentation, as well as discussions with designers and engineers are some of the means for identifying needed functionalities in-house. Tabular comparisons of AEE component features and vendor literature and presentations are the key means for establishing whether the components offered provide the functionality needed.

In defining the needed functionality, it is important to consider an appropriate time frame for the AEE component or tool being considered. Obviously, for investing in the purchase of an AEE component and the larger expense of providing adequate staff training in the use of the tool, the SME wants more functionality than just that needed to attack today's problems. It is necessary to do some projection to identify future needs and future business potentials that may be met by the added functionality. If available, records of past RFQs not responded to or proposals rejected by the client may be excellent sources of information on missed opportunities, which may be due, at least in part, to inadequate functionality.

On the other hand, it is unrealistic to plan for too long a time horizon, for two reasons:

1. Internally, long-run business opportunities and directions become too diffuse to influence specific tool selections.
2. Externally, the AEE tool vendor market is probably changing faster than the SME's business environment, making long-range projection difficult. New functionalities requested by a substantial segment of a tool vendor's users tend to become available in subsequent releases and versions. Mergers and teaming arrangements among vendors bring functionalities previously available only in separate tools into one environment. New technical developments, and the software industry's responses to them, make entirely new components available to the SME.

In summary, the SME must develop a precise list of needed and desired functional capabilities for a new AEE tool, derived from an analysis of current and expected future needs, but tempered by a judicious evaluation of potential changes both in the SME's business and in the software vendor industry. Candidate components can then be evaluated against such a list.

#### **4.1.1.2 Interoperability**

The major theme of this report is encapsulated below:

*Advanced Engineering Environments (AEEs), through which people and tools can effectively interoperate in the delivery of engineering products and services, are becoming feasible even for the smallest SME.*

In the world of SMEs today, interoperability ranks a close second to functionality as a tool selection criterion. The day of the independent tool is long gone. SMEs are no longer willing to manually copy the output of one tool to serve as the input of the next tool—an effort that is neither productive, cost-effective, nor accurate, albeit a practice all too common in the early days of computer use.

Interoperability among tools can be achieved in a variety of ways. Among the modes of interoperation discussed in Chapter 5 of Volume I [Fenves 03] of this report series and identified in the two assessment tools presented in Chapter 2 of the current volume are

- tools communicating in a 'native mode';
- tools interfaced through common files (STEP or other standard or neutral format);
- tools interfaced through a shared database;
- tools integrated (by their vendors) over a common shared database; and
- one tool operating within another.

The most important criterion in selecting among competing tools on the basis of interoperability considerations is the degree to which the interoperation mode offered by the tools supports the organization's overall product development process. A pair of illustrative comparisons will make this point clearer. On the one hand, assume that an SME separates the concerns of its design and manufacturing divisions to the point where for each product only one data transfer takes place from the CAD system to the CAM system at the completion of the design process, in waterfall fashion. In this case, even the slowest transfer mode is satisfactory. On the other hand, assume a different organizational structure or process, where the manufacturing division enters early in the design process and emergent designs are frequently sent to the manufacturing division for evaluation and feedback on manufacturability issues. In this case, the SME needs a data transfer mode and a communication interface that reduces the delays in the feedback loop to a minimum. Such intimate interaction can be achieved if

there are no translations to be made, so that two engineers can look at the same model at the same time and discuss costs and changes. A similar distinction applies to CAE tools used once per product for final verification vs. CAE tools iteratively used in the design process for frequent performance evaluation or optimization of the product as it is being designed.

When interoperation becomes intimate, as in the second alternative of the above illustrations, a second interoperability criterion emerges. In the waterfall CAD/CAM and CAD/CAE scenarios, the two sets of specialists that use the two tools interact so seldom that it does not matter much whether the models within the respective tools are understandable to the other discipline or not. Human interaction is primarily face-to-face or through drawings, plots, Web pages or e-mail messages. All of these “data transfer modes” are much more flexible and redundant than direct transfers between tools. As the interaction becomes more intimate, it becomes increasingly important that the computer-based models used by the tools be understandable, to some degree at least, to the specialists in the interacting disciplines. Otherwise, the potential offered by rapid iterations in the design process will not be fully exploited, as people have to slow down to mentally translate strange models into their own terms.

Whenever translation between computer-based models is involved, regardless of the transfer rate, a third interoperability criterion emerges, that of translation fidelity. Fidelity is a measure of the extent to which the tool receiving the translated data can construct a complete and faithful computer-based model for its own purposes, without loss of information. It is a complex function of the representations used by the interoperating tools and the comprehensiveness of the translator program. Loss of fidelity in transfer can have serious technical and financial implications, and should be extensively tested as part of the tool selection process.

#### **4.1.1.3 Usability**

It is a truism that a tool must be usable in order to be effectively, even enthusiastically, used. At the basic level, the layout of the interfaces, the function and location of various control features, and the familiarity of the “look and feel” of the tool are usability criteria for every computer-based tool. Software vendors and universities have gained increased understanding of human-computer interaction issues and principles and this knowledge has significantly improved tool interfaces.

For technical tools, such as CAD, CAM and CAE tools, there are two additional usability criteria. First, users insist that the user interface of the tool and the way of specifying actions by the tool be “intuitive.” This imprecise term means that the consequences of specifying an action to the tool, and the responses displayed by the tool, should be what the user expects, based on his/her education, training, and experience with previous tools of the same class.

Second, technical users expect that the tool be “transparent” to some extent, and not a “black box.” A black box does not reveal anything about its inner workings; input goes in and out-

put comes out, with the user left totally in the dark on how the latter was derived from the former. In contrast, a transparent program makes some attempt to explain its reasoning in a terminology familiar to the user. Full transparency is not easy to achieve, and may even be counterproductive. The user does not expect a CAE tool implementing finite element analysis to display all of its intermediate steps; but he/she has the right to expect occasional status messages (“assembling stiffness matrix,” “solving equations,” etc.) and query capabilities for intermediate results or checks.

#### **4.1.1.4 Expandability**

The last set of technical selection criteria deals with the manner in which the tool’s functional capabilities may be expanded in the future. Expandability has two aspects: external and internal. External expandability pertains to what may be obtained from the vendor: the expanded functional capabilities that may be added in the future when needed, and what the expansion entails. As indicated repeatedly in the two volumes of this report series, many vendors provide both light-duty and heavy-duty versions of their tools as a means of expanding the tool’s scope. In other cases, vendors or third-party suppliers provide add-ons to increase tool functionalities. The evaluation criteria for external expandability thus need to address three distinct issues: (1) the expanded capabilities available; (2) the effort required to install the needed expansion(s); and (3) the type of compatibility to be maintained between the original and expanded versions of the tool.

Internal expandability deals with the changes that individual users, or the SME organization on the whole, may make to expand the usability or utility of the tool. This type of expansion is often referred to as “customization.” For example, CAD tools may be customized by inserting parts libraries, scripts for defining custom entities, linkages to databases of non-geometric attributes, etc. Obviously, some classes of tools are inherently more customizable than others. At one extreme, spreadsheets are eminently customizable, as they support essentially any operation on tabular data. On the other hand, production-oriented CAE tools, in contrast to research tools, cannot be expected to be highly customizable. It is important to establish in advance of tool selection the kinds of customization, compatible with the nature of the tool, that is needed or desired, and evaluate candidate tools against this list. Determining whether the vendor will continue support following SME customization is also advised.

### **4.1.2 Service Criteria**

#### **4.1.2.1 Vendor Support and Training**

The single most important non-technical criterion for selecting a tool is the extent of the vendor’s commitment to provide support and training prior, during, and after installation of the selected tool and after any customization by the SME. Such support and training are essential for all levels of tools. Clerical and data entry personnel must be trained and supported so as to be able to execute all tasks within their domains with dispatch and confidence; they cannot be expected to experiment with alternate approaches when a tool malfunction occurs.

Engineers and designers, through their technical background, are more willing to experiment and even to try to “break the tool.” On the other hand, they need extensive training, opportunities to experiment, and a wide set of examples to work on until they have “internalized” the tool to the point where they are willing to make professional decisions based on the results from the tool. The need for this type of advanced professional training cannot be overemphasized.

The vendor’s ability to deliver the kinds of support described above needs to be clearly determined, and its track record explored. The relationship between users and vendors is increasingly becoming one of partnering. The SME needs to recognize that its continued capability to profitably deliver products or services is increasingly dependent on an outside entity, the tool vendor. With the startups, acquisitions and mergers taking place in the software industry, the future of this partnership is at least as difficult to predict as the future technical needs. Nevertheless, predictions must be made and candidates must be evaluated on this basis as well. See the technical note *Selecting Advanced Software Technology in Two Small Manufacturing Enterprises* (Chapter 4 and Appendix C) for additional reading on selecting vendors.<sup>4</sup>

#### **4.1.2.2 Staff Interests**

Computer-based tools are not deployed in a vacuum. Continued and effective use of a tool requires that the personnel using it be actively involved in its acquisition, installation, use, and upgrading, when needed. Users need to feel that they are empowered by the tool, that their professional stature is raised and that their performance is qualitatively and quantitatively improved. The quality and level of tools available is increasingly becoming a staff retention issue, after having been a staff recruiting issue for some time.

It is difficult to give crisp and precise selection criteria for staff interests. The best way to incorporate staff concerns in the selection and evaluation process is to have a broad segment of the intended user population, from senior members to novices, participate actively in the process.

#### **4.1.2.3 Cost**

Cost is an obvious selection criterion, but seldom is it a discriminating criterion for selection among candidate tools of the same class and with roughly the same set of capabilities. This is because of two factors. First, the software market tends to self-calibrate, so that comparable tools have comparable prices, with only occasional exceptions. Second, the internal costs for staff training, process adjustment, and so on, will essentially be the same for any tool in its class.

---

<sup>4</sup> Anderson, W.; Estrin, L.; & Buhman, C. *Selecting Advanced Software Technology in Two Small Manufacturing Enterprises*. Pittsburgh, PA: Software Engineering Institute, Carnegie Mellon Institute. To be published.

In developing the costs associated with the installation of a new tool, it is important that the development be comprehensive. Out-of-pocket costs, including the cost of purchase, any modifications needed to the previous environment, additional space, furniture, even the direct costs of initial staff training, are generally easy to obtain. Many organizations simply stop with such a list. What tends to be forgotten is the cost of providing the affected staff with time and resources to study, explore, and experiment with a tool until each staff member feels fully competent to use the tool and make professional choices and recommendations based on the results produced by the tool. Organizations that don't plan and budget for these costs tend not to provide the released learning time needed. The affected staff members must boot-leg the learning into other tasks, or are forced to make decisions they feel they are not qualified to make. Finally, ongoing support costs such as annual license fees, service contracts, software upgrades, and so on, must not be forgotten.

## **4.2 Selection Resources**

It is clear from the presentation above that many categories of decision making are combined in developing a set of tool selection criteria and then selecting from among the identified candidates. There are several categories of resources that an SME can tap to assist its decision making, briefly summarized below. The SEI Evolutionary Process for Integrating COTS-based systems (EPIC) method and a technical report by Anderson<sup>5</sup> present assessment instruments that address these multiple categories [Albert 02].

### **4.2.1 Web-Based Information Resources**

In the early days of computing in engineering and manufacturing, user groups developed around hardware platforms and major tools (then simply called programs). The advice and assistance provided by these peer groups were enormously helpful in fostering the culture of computer use among the pioneering organizations. Today, advice and counsel of trusted peers is still very valuable. With the spread of computing, the peer community has greatly expanded, and peer group organizations have largely disappeared. On the other hand, IT networks and the World Wide Net have brought communities together. There are numerous forums, chat rooms, on-line newsletters, and so forth, with subject matters relevant to every aspect of engineering environments and their constituent tools. Access to a few of these sites can provide useful input to tool selection.

### **4.2.2 Magazines and Journals**

Most technical journals dealing with engineering and manufacturing that cover these fields, particularly the trade magazines distributed free to qualified subscribers, provide two kinds of features germane to tool selection. First, many of these publications provide, on a periodic

---

<sup>5</sup> Anderson, *Selecting* (see note 4).

basis, tabular summaries and comparisons of capabilities of classes of tools. Software vendors make sure that their products appear in these summaries, so that the coverage of these summaries is generally quite complete. A recent summary table for a particular class of tools is valuable for the SME in (1) identifying some of the major tool evaluation and selection criteria; (2) identifying potential vendors; and (3) pruning the list of candidates to consider by eliminating those with tabulated capabilities outside the intended envelope. Second, most publications provide occasional software reviews or feature articles describing, in some depth, capabilities of a new or significantly revised tool. Good reviews in this category, particularly the ones written in the first person, provide a vivid picture of the strengths and weaknesses of the tools described. Reviews of the top candidate tools in a selection process can aid significantly in their evaluation.

### **4.2.3 Trade Shows**

The opportunity to “check the teeth” or “kick the tires” of candidate purchases has traditionally been part of the selection process. The equivalent of these rituals for computer-based tools is the trade show. These are either stand-alone events or attached to other professional or trade group meetings. Here, booths display the newest versions of tools, and ancillary events provide short courses, discussion and question-and-answer sessions, and so forth. At such shows, SMEs can gather just about any kind of information on tools of interest, as well as contacts with many sources of further information. The presence of so many competing products in one place can be overwhelming, and two points of advice are in order. First, you have to go to such shows prepared. The amount of information you can glean by stopping at a booth is limited; furthermore, the interface features of all tools in a given category are today so “homogenized” that a brief look will not identify any differentiating characteristic among the tools. Therefore, you have to have made some preliminary pruning and you have to resolve to examine in some detail no more than a handful of the top candidates. Second, you have to be ready for surprises. A new tool or new feature of an existing tool, first unveiled at the trade show, may counteract even the best preparation and alter the list or previous ranking of candidates. A good strategy to follow is to watch for booths surrounded by large crowds and to check these out for relevance.

### **4.2.4 Consulting Services**

Finally, there is a whole range of consulting services that an SME may purchase to assist in the tool selection and evaluation process. These services range from the preparation of selection criteria and ranking of candidate tools accordingly to full tool selection, installation, and the necessary staff training.



## 4.3 Tool Selection Summary

Technical criteria for selecting a tool to be added to the SME's engineering environments include the following:

- functional capabilities of the tool, based on current and expected future needs, but taking into account potential changes in business and software;
- interoperability appropriate to support the organization's overall product development process;
- usability, particularly the extent to which the tool is deemed "intuitive" and reasonably "transparent" by its potential users; and
- expandability, in terms of tool features that may be subsequently added and customization that users may apply to extend the tool's capabilities.

Service criteria to consider include the factors below:

- extent of support and training provided by the vendor;
- match between the interests of the affected users and the tool's capabilities; and
- cost, including out-of-pocket costs for purchase, installation, and training, and internal costs for adequate user experimentation and learning.

The resources available to assist in making tool selections include the following:

- Web-based sources such as forums and chat rooms;
- summary tabular comparisons of tools and feature articles on specific tools in professional and trade publications;
- trade shows demonstrating the tools; and
- consulting services.



---

## 5 AEE Technology Adoption

A typical technology installation process contains steps such as choosing the technology product, acquiring it, physically installing it in the work environment, and training operators in how to use the system (which may or may not match their current procedures). While all of these actions are necessary to incorporate a new technology into an SME, they are not sufficient, and will not produce the desired benefits until the SME **adopts** the technology and **integrates** it into its operation.

Technology adoption is achieved when the people who need to use the new technology

- are aware of the presence and the status of the technology;
- have appropriate access to it;
- are trained to use it;
- get support for using it; and
- actually *do* use it to support their work tasks [Garcia 02].

### 5.1 The Adoption Challenge

The benefits of AEE adoption by SMEs are many (see Volume I, Chapter 3), and yet many SMEs remain reluctant to adopt advanced software-based technologies [Fenves 03]. In many cases, this reluctance may be traced to prior experience with unsuccessful software adoptions.

Technology adoption is rarely achieved without challenge. While a new technology is introduced, the every day work of the organization must continue. Therefore, the adoption effort is superimposed upon normal workday activities. As the technology is introduced, the organization may face challenges such as the following

- Diverting critical resources from ongoing production activities to technology analysis and selection activities;
- Diverting critical production resources for training;
- Modifying time-tested work practices to utilize the capabilities of the new technology;
- Changing the skill sets within the organization to accommodate the installation, utilization, and support of the new technology; and/or
- Overcoming the common human resistance to change.

These challenges can affect the performance of the organization, as illustrated in Figure 4 [Garcia 02].

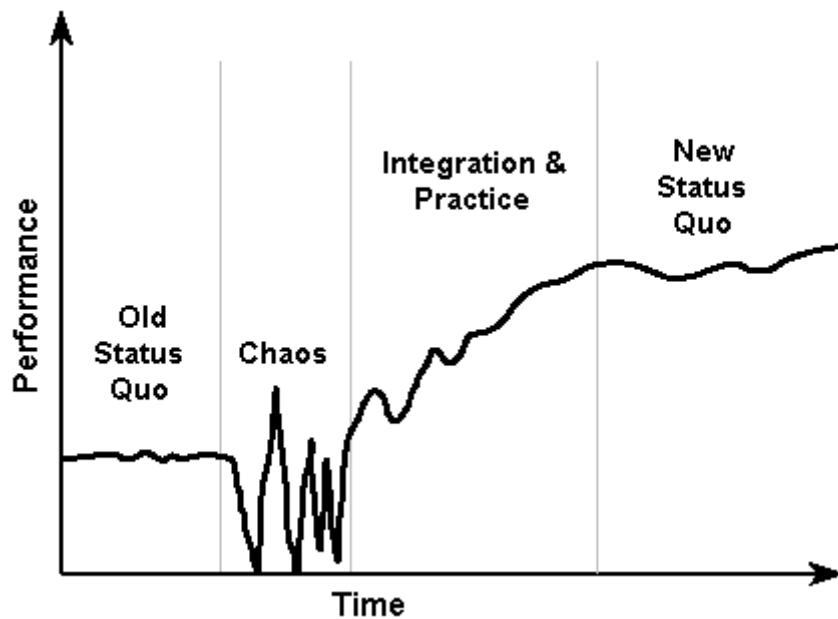


Figure 4: The Impact of Technology Adoption

Change is difficult for people and for organizations. Technology adoption is synonymous with change: a change of technology; a change of users' skills; a change in the way work is done.

*There is nothing more difficult to take in hand, more perilous to conduct or more uncertain in its success than to take the lead in the introduction of a new order.*

Niccolò Machiavelli: The Prince, 1515

[Machiavelli 15]

One method of reducing the fear of change and improving the probability of successful technology adoption is to implement adoption via an orderly process that achieves the following:

- exposes the need for change to all of the stakeholders;
- involves the stakeholders in the development of the adoption plan;
- defines the future state of the organization after the adoption;
- maps the path from the present state to the future state for all to see;
- identifies and addresses anticipated barriers to technology adoption [Estrin 03]; and
- minimizes the risks of technology adoption.

## 5.2 The Technology Adoption Process

The goal of technology adoption is improvement of operations and process, an area of study addressed vigorously since the 1920s. The Shewart Cycle and the Initiate, Diagnose, Establish, Act, and Leverage (IDEAL) model (not elaborated here) are among the many process improvement models that exist today [Shewart 39, McFeeley 96]. The remainder of this chapter will discuss technology adoption using a modification of the Shewart Cycle.

The Shewart Cycle is an early model developed for process improvement. Although its creation predates the existence of software, it remains fully applicable to software-based technology adoption today. The Shewart Cycle was later articulated by W. Edwards Demming as “Plan, Do, Study, Act” [Demming 82]. Presently, the universally accepted nomenclature is “Plan, Do, Check, Act” or PDCA. These four activities comprise a method for achieving continuous process improvement. The four steps are described as follows:

**Plan:** Define a plan for a new process or improvements to an existing process. This plan must include monitoring and data collection methods as well as performance objectives.


**Do:** Implement the proposed changes on a small scale, perhaps as a pilot project. Obtain performance measurements before, during, and after the pilot.

**Check:** Study the measurements collected during the pilot. Analyze the results to identify and understand failures and successes. Determine the “lessons learned” during the pilot.

**Act:** Act to apply the conclusions of the prior analysis.

**NOTE:** Based upon this analysis, acceptable actions may range from full-scale implementation of the process change, to a restart of the Shewart cycle, to abandonment of the process change.

This process is illustrated in Figure 5.

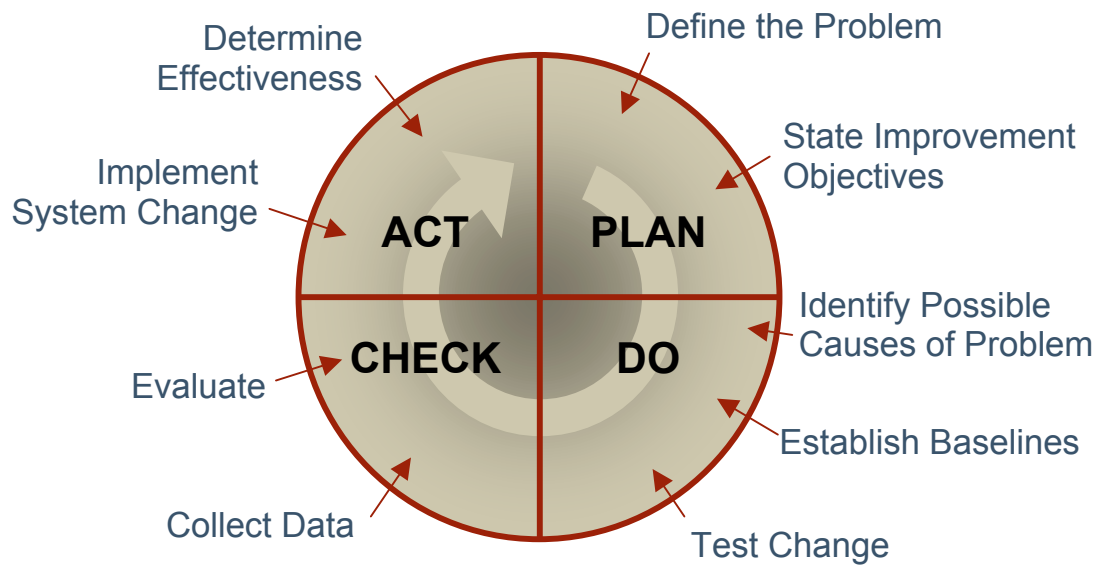

*Figure 5: Shewart Cycle*

[Demming 82]

A derivative of this process specifically adapted for technology adoption is shown in Figure 6 [Garcia 03]. This figure represents one PDCA cycle.

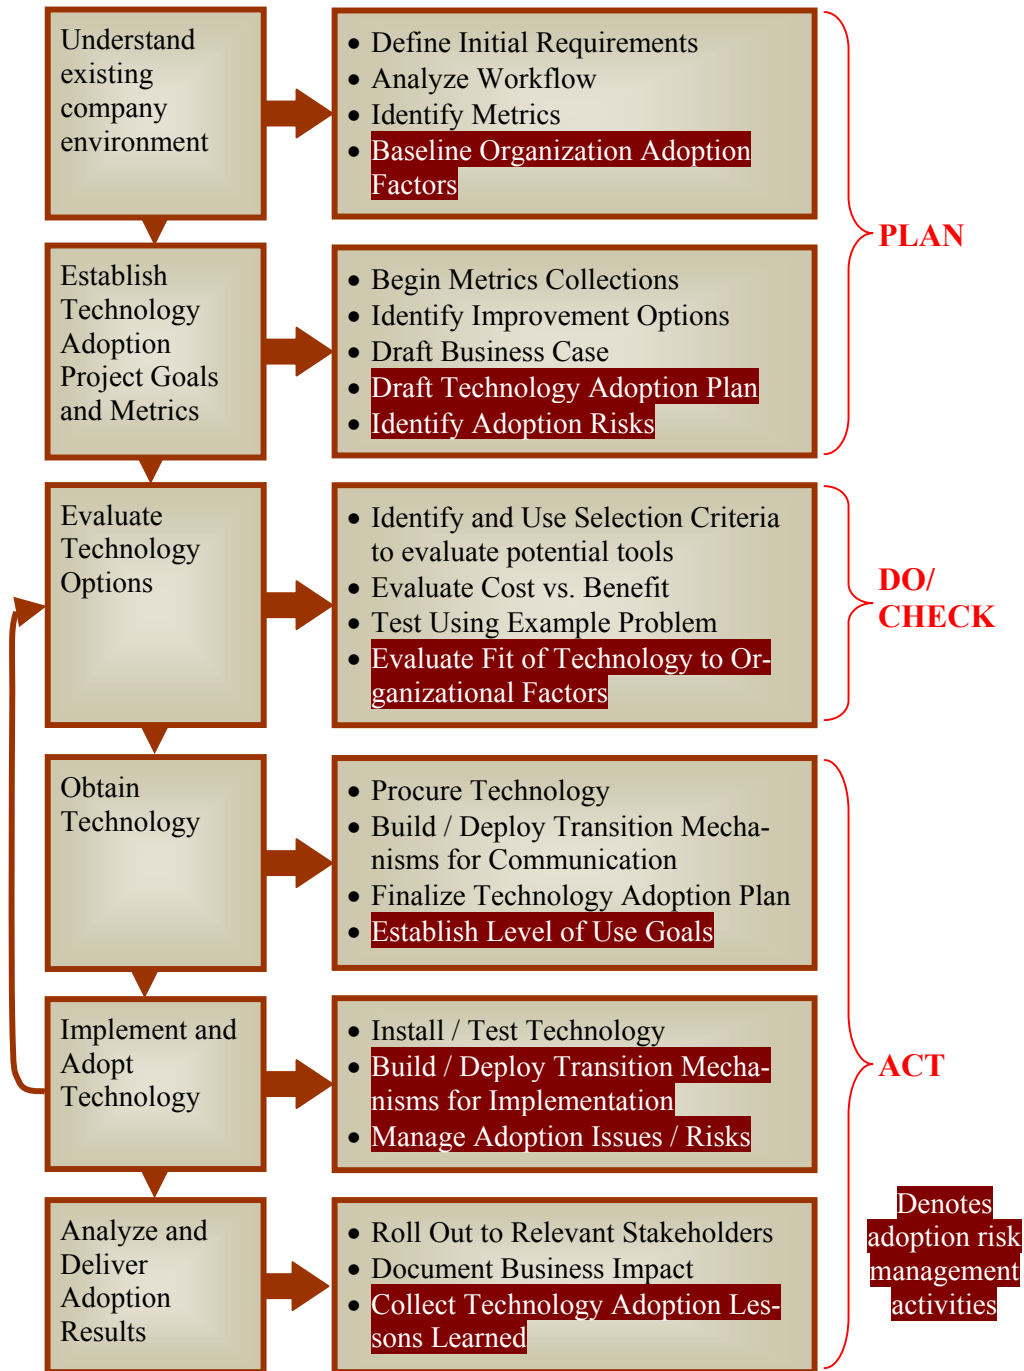


Figure 6: Technology Adoption Process

The six phases of this technology adoption process are as follows:

1. Understand existing company environment;
2. Establish Technology Adoption Project Goals & Metrics;
3. Evaluate Technology Options;

4. Obtain Technology;
5. Implement and Adopt Technology; and
6. Analyze & Deliver Adoption Results.

These phases are described in detail in the following sections.

### **5.2.1 Understand Existing Company Environment**

The Technology Adoption Process of Figure 6 focuses significant attention on the planning phase of technology adoption. Research has shown that this is of critical importance to SMEs because they tend to rely on informal rules and infrastructures, often depending on “tribal” knowledge (i.e., a mixture of experience and expertise transmitted from one worker to another). Rules or infrastructures for decision making are often fuzzy. Documentation and communication of operating procedures to employees and/or vendors is often unclear. This absence of defined processes generates challenges in both the prediction of the effects of software technology adoption and the adoption execution itself [Estrin 03].

To address these limitations the Technology Adoption Process uses a four-step method to develop an understanding of the SMEs environment.

#### **1. Define Initial Requirements**

To initiate a technology adoption, the stakeholders within the organization first define business and technical needs to be addressed. This is done based upon the following:

- identification of the problem to be addressed;
- company vision;
- stakeholder input; and
- general understanding of the company external business environment (competitors, market drivers, technology advances, etc.).

This effort results in a statement of requirements and the assignment of resources for further effort on the project.

#### **2. Analyze Workflow**

An early task of the project team is to document the organization’s “as-is” business processes relevant to the problem being addressed. This involves identifying process steps and work products related to the problem. Research is based upon company process documents, technology improvement requirements, company employee interviews, and so forth. The effort results in a description of the current company process(es). This is useful in understanding the role of the potential technology adoption, and also provides a baseline against which improvement can be measured.



### **3. Identify Metrics**

Performance measures must be defined to enable monitoring of progress and recognition of success. For SMEs, this is typically tied to how managers communicate company performance to owners / executives. Metrics are typically derived from the improvement requirements, the “as-is” process description, input from stakeholders, and so forth.

### **4. Baseline Organizational Adoption Factors**

Technology adoption can be viewed as a convergence of technology, organization, and people; that is, people operating within an organization to incorporate a new technology into their daily routine. The sociological and organizational context of the technology adoption is often a key factor in developing a technology adoption plan defining the application of assets and the roles of the stakeholders [Adler 90, Gladwell 02].

## **5.2.2 Establish Technology Adoption Project Goals and Metrics**

The second phase of the technology adoption process is the development of an adoption plan. The focus of this phase is to ensure that the technology adoption supports the business objectives of the company, and to ensure that the results of the adoption are measurable. While this focus is important in any organization, large or small, it is critical for the SME. While there are many reasons for the technology adoption failures among SMEs, failure to link technology adoption to key business objectives is one of the more common [Buhman 03]. In creating this linkage, the SME must understand current business practices, current operations processes, the company’s strategic goals, and the company’s desired future state.

Technology adoption is frequently both a capital expense and a workforce development effort. For SMEs, both of these are a challenge:

- Capital investment is difficult due to the often-limited financial resources of the SME.
- Workforce development is difficult due to both the expense of training and the “out-of-the-office” time of key employees.

For these and other reasons, SMEs are often very conservative when investing in technology adoption, and demand a “bulletproof” business case before proceeding.

The technology adoption process builds this business case in five steps.

#### **1. Begin Metrics Collection**

Begin collection of metrics to establish a baseline against which future improvements can be evaluated. This activity may also involve calculating measures from a previous time period using available data. This activity is often the first time that an SME has obtained an in-

depth view of the process to be improved. This clear view of an inefficient and/or ineffective process will often serve as a stimulus to reinforce the process improvement activity.

## **2. Identify Improvement Options**

Identify multiple improvement options that meet the goals of the improvement effort. Many ideas may come from company employees at all levels and some improvement options may or may not include adoption of new technologies. Ideas that involve a technology should remain general. (For example, an option should be expressed as “Adopt 3-D CAD” vs. arbitrarily specifying a 3-D CAD tool vendor.)

## **3. Create a Draft Business Case**

Evaluate the improvement options to determine both the total cost (e.g., capital investment, training costs, sustainment costs, licensing) of technology adoption and the expected return. Estimate and analyze cash flow, a subject critical to many SMEs. Create and distribute a draft business case summarizing this information, along with measures, approach, and rationale.

## **4. Create a Draft Technology Adoption Plan**

Create a draft technology adoption plan. This plan should include the following:

- delineation of stakeholder expectations;
- adoption process schedule and milestones;
- adoption process staffing;
- communication processes; and
- constraints (e.g., time, money, staff availability, user skills) imposed upon the adoption process.

## **5. Identify Adoption Risks**

Define detailed adoption context by identifying barriers and risks to adoption, including people and organizational constraints. For example, identify Adler weaknesses in terms of organizational assets and appropriateness of roles [Gladwell 02].

### **5.2.3 Evaluate Technology Options**

The third phase of the technology adoption process is the evaluation and selection of the appropriate technology.

#### **1. Cost Benefit Analysis**

Document the costs and benefits of each of the improvement options, including initial and recurring costs as well as both tangible and strategic benefits. Prioritize the improvement

options based upon the draft business case and the draft technology adoption plan. Select the best option based upon current understanding. Selecting multiple improvements at one time should be avoided to avoid the chaos zone shown in Figure 4.

## **2. Identify and Use Selection Criteria To Evaluate Potential Tools**

If the selected improvement option involves adoption of a new technology, identify selection criteria and begin an evaluation process to select a specific product that supports the technology. Due to the often complex nature of the selection process the use of a structured selection process is recommended.<sup>6</sup>

## **3. Test Using a Sample Problem**

Identify a model problem to test high-risk aspects of the proposed solution. This is also important to validate vendor claims and identify changes needed to integrate the technology into the future-state business process.

## **4. Evaluate the Fit of the Technology to Organization Factors**

Consider the desired technology against the capabilities of the organization and examine the risks and supporting context. This activity can point to likely adoption patterns and provide insight into the plan and schedule of the technology adoption.

# **5.2.4 Obtain Technology**

The fourth phase of the adoption process is the actual procurement of the technology and establishment of use goals, final adoption plan, and a transition communication mechanisms.

## **1. Procure Technology**

Finalize agreements with the technology vendor to purchase the selected product and any necessary training and/or consulting support.

## **2. Establish Level of Use Goals**

Define level of use goals for the technology. Define these goals not just as the magnitude of technology use, but in terms of roles and process steps. For example, set objectives for when a 3D CAD tool is used within a development process (like the proposal step) and which roles (e.g., engineer, designer) use the tool.

## **3. Finalize Technology Adoption Plan**

Update and finalize the draft technology adoption plan to include all activities required to move from the “as-is” to the “to-be” business processes.

---

<sup>6</sup> Anderson, *Selecting* (see Section 4, note 4).

#### **4. Build/Deploy Transition Mechanisms for Communication**

Create the necessary communication items (e.g., progress reports, training plans) and distribute to the stakeholders.

### **5.2.5 Implement and Adopt Technology**

#### **1. Install the Technology**

Insert the technology/tool into the company business using the “to-be” business process.

#### **2. Build/Deploy Transition Mechanisms for Implementation**

Provide all transition items for implementing the To-Be process as described in the technology adoption plan, including training, consulting, and transition monitoring and metrics collection.

#### **3. Manage Adoption Issues and Risks**

Actively and regularly monitor the adoption risks and context because the context is always changing. This includes observing progress against metrics and observing indicators of technology adoption bottlenecks.

### **5.2.6 Analyze and Deliver Adoption Results**

This final phase of the technology adoption process is focused upon institutionalizing the adoption process within the SME. Part of this process involves building support for the future technology adoption efforts by publicizing the success of past and current efforts.

#### **1. Document the Business Impact**

Summarize the business impact in terms of tangible and strategic benefits. This also includes asking employees about impact throughout the implementation.

#### **2. Collect Technology Adoption Lessons Learned**

Examine how the organization (including people, assets, and context) performed in the technology adoption and identify ways to improve in technology adoption. For example, did the organization meet the technology level of use objectives as well as the business objectives?

#### **3. Roll Out to Relevant Stakeholders**

Summarize the business case and communicate it to the company stakeholders, both internal and external.

---

## 6 Conclusion

The intent of Volume I [Fenves 03] and Volume II of this report series has been to build awareness of the AEE concept, and to provide guidance to SMEs considering the adoption of AEE technology. This chapter summarizes key concepts presented in these two volumes.

AEEs are integrated toolsets that enhance the productivity of participants in the product development and production processes. They are defined as computational and communications systems that can create virtual and/or distributed environments functioning to link researchers, technologists, designers, manufacturers, suppliers, and customers.

AEEs may be classified in three levels. A **Basic AEE**, well within the reach of most SMEs, consists of only two well-matched COTS software products providing design and analysis capabilities. An **Intermediate AEE** is also suitable for implementation by SMEs. While also composed of COTS design and analysis products, it provides higher levels of data integration and interoperability than the Basic AEE. A **Comprehensive AEE** providing total data sharing and interoperability with both technical and non-technical IT systems throughout the organization does not yet exist. This description serves primarily as a roadmap of future developments and standardization efforts at the component interfaces.

An AEE enables an SME to utilize more efficient and more effective design processes. Without the benefits of an AEE, an SME is forced to design a product based upon experience and limited manual analysis processes. True functionality of the product is not known until it is built and tested. With an AEE, the SME may analyze and predict end-product performance while still in the design stage, enabling optimization of the design. As the SME migrates to more advanced AEEs, this prediction and optimization process becomes faster, easier, and more effective. Some of the benefits an AEE can offer to an SME include the following:

- **Reductions in product development time** - AEEs encourage and support design reuse and parametric design processes, eliminate redundant efforts during the design process, encourage functional analysis earlier in the design cycle, and encourage collaboration among designers, engineers, manufacturers, suppliers, and customers.
- **Reductions in production time** - AEEs enable design optimization by eliminating overly conservative assumptions. They minimize component inventories by encouraging and supporting design reuse. They also enable process designers to simulate and optimize manufacturing processes during the product design stage.

- **Improvements in product quality** - AEEs encourage and support functional analysis and simulation prior to manufacturing. They enable design optimization by evaluating the impacts of design tradeoffs. They validate design performance prior to manufacturing. They encourage and support multi-disciplinary collaboration among designers, engineers, manufacturers, suppliers, and customers. They encourage and support reuse of existing successful designs. They enable the use of advanced simulation techniques such as Monte Carlo and Taguchi methods [Taguchi 00].
- **Reductions of product cost** - AEEs enable design optimization, eliminating costly, overly conservative assumptions. They encourage and support design reuse, minimizing the required component inventory. They enable process designers to simulate and optimize manufacturing processes during the product design stage. They can also reduce maintenance costs, spare parts inventories, warranty costs, field changes, and upgrades. That is, doing it right up front has enormous impact on the cost of the product over its life cycle, to both the producer and the customer.
- **Reductions of product development cost** - AEEs create reductions in the product development schedule (see above). They detect functional problems earlier in the design process, when they are less costly to fix. They encourage and support design experiments early in the design process.
- **Improved market agility** - AEEs enable the SME to cope with rapidly changing global market demands and competitive environments.
- **Improved communications** - AEEs provide a means of improving communications with both customers and suppliers, strengthening the supply chain.

The process of adopting an AEE begins with the evaluation of the current state of the SME. The SME must determine the current mix of products, degree of internal integration, current level of computer use, current skill and knowledge levels, and perceived problems. This is followed by the definition of a goal state, including the desired future state of the SME, and the strategies to overcome the perceived problems. From this information, the SME may determine the scope and level of the AEE to be adopted, leading to the specification of the requirements for the components of the AEE, and the selection of the COTS AEE components satisfying these requirements.

The components described in this report cover a wide range of characteristics necessary to implement AEEs. A single SME does not need to implement all of these components, but needs to carefully identify the components necessary for its specific needs, the planned interactions between them, and the range of COTS products implementing the needed components. A carefully prepared plan will lead to successful expansion of the AEE with additional components in the future. These reports provide a tool to assist the SME in defining the value of an AEE to its operation, and a tool to assist the SME in identifying the AEE content.

Many SMEs evolve or migrate from lower AEE levels to higher ones. As new tools and capabilities are introduced into a company's support environment on an incremental and opportunistic basis, the SME must recognize the shifts in operational modes and philosophies will be needed to gain the full benefit of the AEE.

In choosing a tool to be added to the SME's engineering environments, the SME must consider the functional capabilities of the tool, based on current and expected future needs; however, the SME must also take into account potential changes in business and software. The SME must also ensure that the tool's interoperability is appropriate to support the organization's overall product development process. Usability, particularly the extent to which the tool is deemed "intuitive" and reasonably "transparent" by its potential users, is a key factor in tool selection. Expandability, in terms of tool features that may be subsequently added and customization that users may apply to extend the tool's capabilities, should also be considered.

Selection, procurement, and installation of a new technology will not produce the desired benefits until the SME adopts the technology and integrates it into its operation. Only when the SME's staff is aware of the technology, has access to it, is trained to use it, gets support for using it, and actually DOES use it will the benefits accrue to the SME.

A six-step technology adoption process based upon the Shewart Cycle is described. The process has been used successfully to introduce advanced technologies into SMEs and consists of the following steps:

1. Understand existing company environment;
2. Establish technology adoption project goals and metrics;
3. Evaluate technology options;
4. Obtain technology;
5. Implement and adopt technology;
6. Analyze and deliver adoption results.





---

# Acronyms

<b>2D</b>	Two-Dimensional
<b>3D</b>	Three-Dimensional
<b>AEE</b>	Advanced Engineering Environment
<b>ASP</b>	Application Service Provider
<b>CAD</b>	Computer-Aided Design
<b>CAE</b>	Computer-Aided Engineering
<b>CAM</b>	Computer-Aided Manufacturing
<b>CMU</b>	Carnegie Mellon University
<b>COTS</b>	Commercial Off-the-Shelf
<b>FEA</b>	Finite Element Analysis
<b>IDEAL</b>	Initiate, Diagnose, Establish, Act, and Leverage
<b>IGES</b>	Initial Graphics Exchange Specification
<b>NC</b>	Numerical Control
<b>NIST</b>	National Institute of Standards and Technology
<b>PDM</b>	Product Data Management
<b>RFQ</b>	Request for Quotation
<b>SEI</b>	Software Engineering Institute
<b>SME</b>	Small Manufacturing Enterprise
<b>STEP</b>	Standard for the Exchange of Product Model Data
<b>TIDE</b>	Technology Insertion, Demonstration, and Evaluation



---

# References/Bibliography

URLs are valid as of the publication date of this document.

- [Adler 90]** Adler, P.S. & Shenhar, A. *Adapting your technological base: The organizational challenge*. Sloan Management Review (Fall 1990) 25-37.
- [Albert 02]** Albert, C.; Brownsword, L.; Bentley, D.; Bono, T.; Morris, E.; & Pruitt, D. *Evolutionary Process for Integrating COTS-Based Systems (EPIC)* (SEI/CMU-2002-TR-005, ADA408653). Pittsburgh, PA: Software Engineering Institute, Carnegie Mellon University, 2002. <<http://www.sei.cmu.edu/publications/documents/02.reports/02tr005.html>>.
- [Buhman 03]** Buhman, C. "Evaluating and Selecting Software in a Smaller Manufacturing Company." *Dynamic Business* 58, 2 (2003): 18-19.
- [Demming 82]** Demming, W. E. *Out of the Crisis*. Cambridge, MA: MIT, Center for Advanced Engineering Study, 1982.
- [Estrin 03]** Estrin, L.; Foreman, J; & Garcia, S. *Overcoming Barriers to Technology Adoption in Small Manufacturing Enterprises (SMEs)* (CMU/SEI-2003-TR-012) Pittsburgh, PA: Software Engineering Institute, Carnegie Mellon University, 2003 <<http://www.sei.cmu.edu/publications/documents/03.reports/03tr012.html>>.
- [Elm 03]** Elm, J. & Robert, J. *Integration of Computer-Aided Design and Finite Element Analysis Tools in a Small Manufacturing Enterprise* (CMU/SEI-2003-TR-015). Pittsburgh, PA: Software Engineering Institute, Carnegie Mellon University, 2003. <<http://www.sei.cmu.edu/publications/documents/03.reports/03tr015.html>>.
- [Fenves 03]** Fenves, S.; Sriram, R.; Choi, Y.; Elm, J. & Robert, J., *Advanced Engineering Environments for Small Manufacturing Enterprises: Volume I*. Pittsburgh, PA: Software Engineering Institute, Carnegie Mellon University, 2002. <<http://www.sei.cmu.edu/publications/documents/03.reports/03tr013.html>>.

- [Garcia 02]** Garcia, S. & Seeley, G. *Beyond Technology Installation: Realizing Better Return from Your IT Investments*. Pittsburgh, PA: Software Engineering Institute, Carnegie Mellon University, 2002.  
<<http://www.sei.cmu.edu/tide/publications/garcia3rev.pdf>>.
- [Garcia 03]** Garcia, S. & Estrin, L. *Managed Technology Adoption: Part I, The Way to Realize Better Return From Your IT Investments*. Pittsburgh, PA: Dynamic Business, 58, 7 (Sept. 2003): 16-17.
- [Gladwell 02]** Gladwell, M. *The Tipping Point: How Little Things Can Make a Big Difference*. Boston, MA: Back Bay Books; 2002, ISBN: 0316346624.
- [Machiavelli 15]** Niccolo Machiavelli. *The Prince*, 1515.  
<<http://www.constitution.org/mac/prince00.htm>>.
- [McFeeley 96]** McFeeley, R. *IDEAL: A User's Guide for Software Process Improvement* (CMU/SEI-96-HB-001, ADA305472). Pittsburgh, PA: Software Engineering Institute, Carnegie Mellon University, 1996  
<<http://www.sei.cmu.edu/publications/documents/96.reports/96.hb.001.html>>.
- [Place 01]** Place, P. *Guidance on Commercial-Based and Open Systems for Program Managers* (CMU/SEI-2001-SR-008, ADA392367). Pittsburgh, PA: Software Engineering Institute, Carnegie Mellon University, 2001  
<<http://www.sei.cmu.edu/pub/documents/01.reports/pdf/01sr008.pdf>>.
- [Shewart 39]** Shewart, W. *Statistical Method from the Viewpoint of Quality Control*. Washington, DC: Department of Agriculture, 1939 and Dover, 1968.
- [SPIRC 01]** Mitchell, P. & Trichtinger, J. *SPIRC-SEI TIDE Project: Primary Research Survey Results*. Pittsburgh, PA: Catalyst Connection (formerly Southwest Pennsylvania Industrial Research Center), 2001.
- [Taguchi 00]** Taguchi, G.; Chowdhury, S.; & Taguchi, S. *Robust Engineering: Learn How to Boost Quality While Reducing Costs & Time to Market*. Columbus, OH: McGraw-Hill, 2000.
- [Weinberg 97]** Weinberg, G. *Quality Software Management: Anticipating Change (Volume 4)*. New York, NY: Dorset House, 1997, ISBN: 0932633323.

<b>REPORT DOCUMENTATION PAGE</b>			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave Blank)		2. REPORT DATE May 2004		3. REPORT TYPE AND DATES COVERED Final
4. TITLE AND SUBTITLE Advanced Engineering Environments for Small Manufacturing Enterprises: Volume II			5. FUNDING NUMBERS F19628-00-C-0003	
6. AUTHOR(S) Steven J. Fenves (NIST), Ram D. Sriram (NIST), Young Choi (NIST), Joseph P. Elm (SEI), John E. Robert (SEI)				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Software Engineering Institute Carnegie Mellon University Pittsburgh, PA 15213			8. PERFORMING ORGANIZATION REPORT NUMBER CMU/SEI-2004-TR-007	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) HQ ESC/XPK 5 Eglin Street Hanscom AFB, MA 01731-2116			10. SPONSORING/MONITORING AGENCY REPORT NUMBER ECS-TR-2004-TR-007	
11. SUPPLEMENTARY NOTES				
12A DISTRIBUTION/AVAILABILITY STATEMENT Unclassified/Unlimited, DTIC, NTIS			12B DISTRIBUTION CODE	
13. ABSTRACT (MAXIMUM 200 WORDS) To assist the Small Manufacturing Enterprise (SME) in adopting Advanced Engineering Environments (AEEs), this report provides two self-assessment tools. The Self-Assessment Tool for Engineering Environments (SAT-EE) assists an SME in assessing the adequacy of the current computing support environment in handling technical tasks. The Self-Assessment Tool for Engineering Tool Capabilities (SAT-ETC) enables the SME to collect data on the needs of the company, and maps it to specific classes of AEE tools. An SME may migrate to higher AEE levels through an orderly sequence of steps. Migration success is enhanced by careful attention to AEE component selection and by application of a defined technology adoption process.				
14. SUBJECT TERMS Small Manufacturing Enterprise, SME, Advanced Engineering Environments, AEE, Self-Assessment Tool for Engineering Environments, SAT-EE			15. NUMBER OF PAGES 67	
16. PRICE CODE				
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT UL	